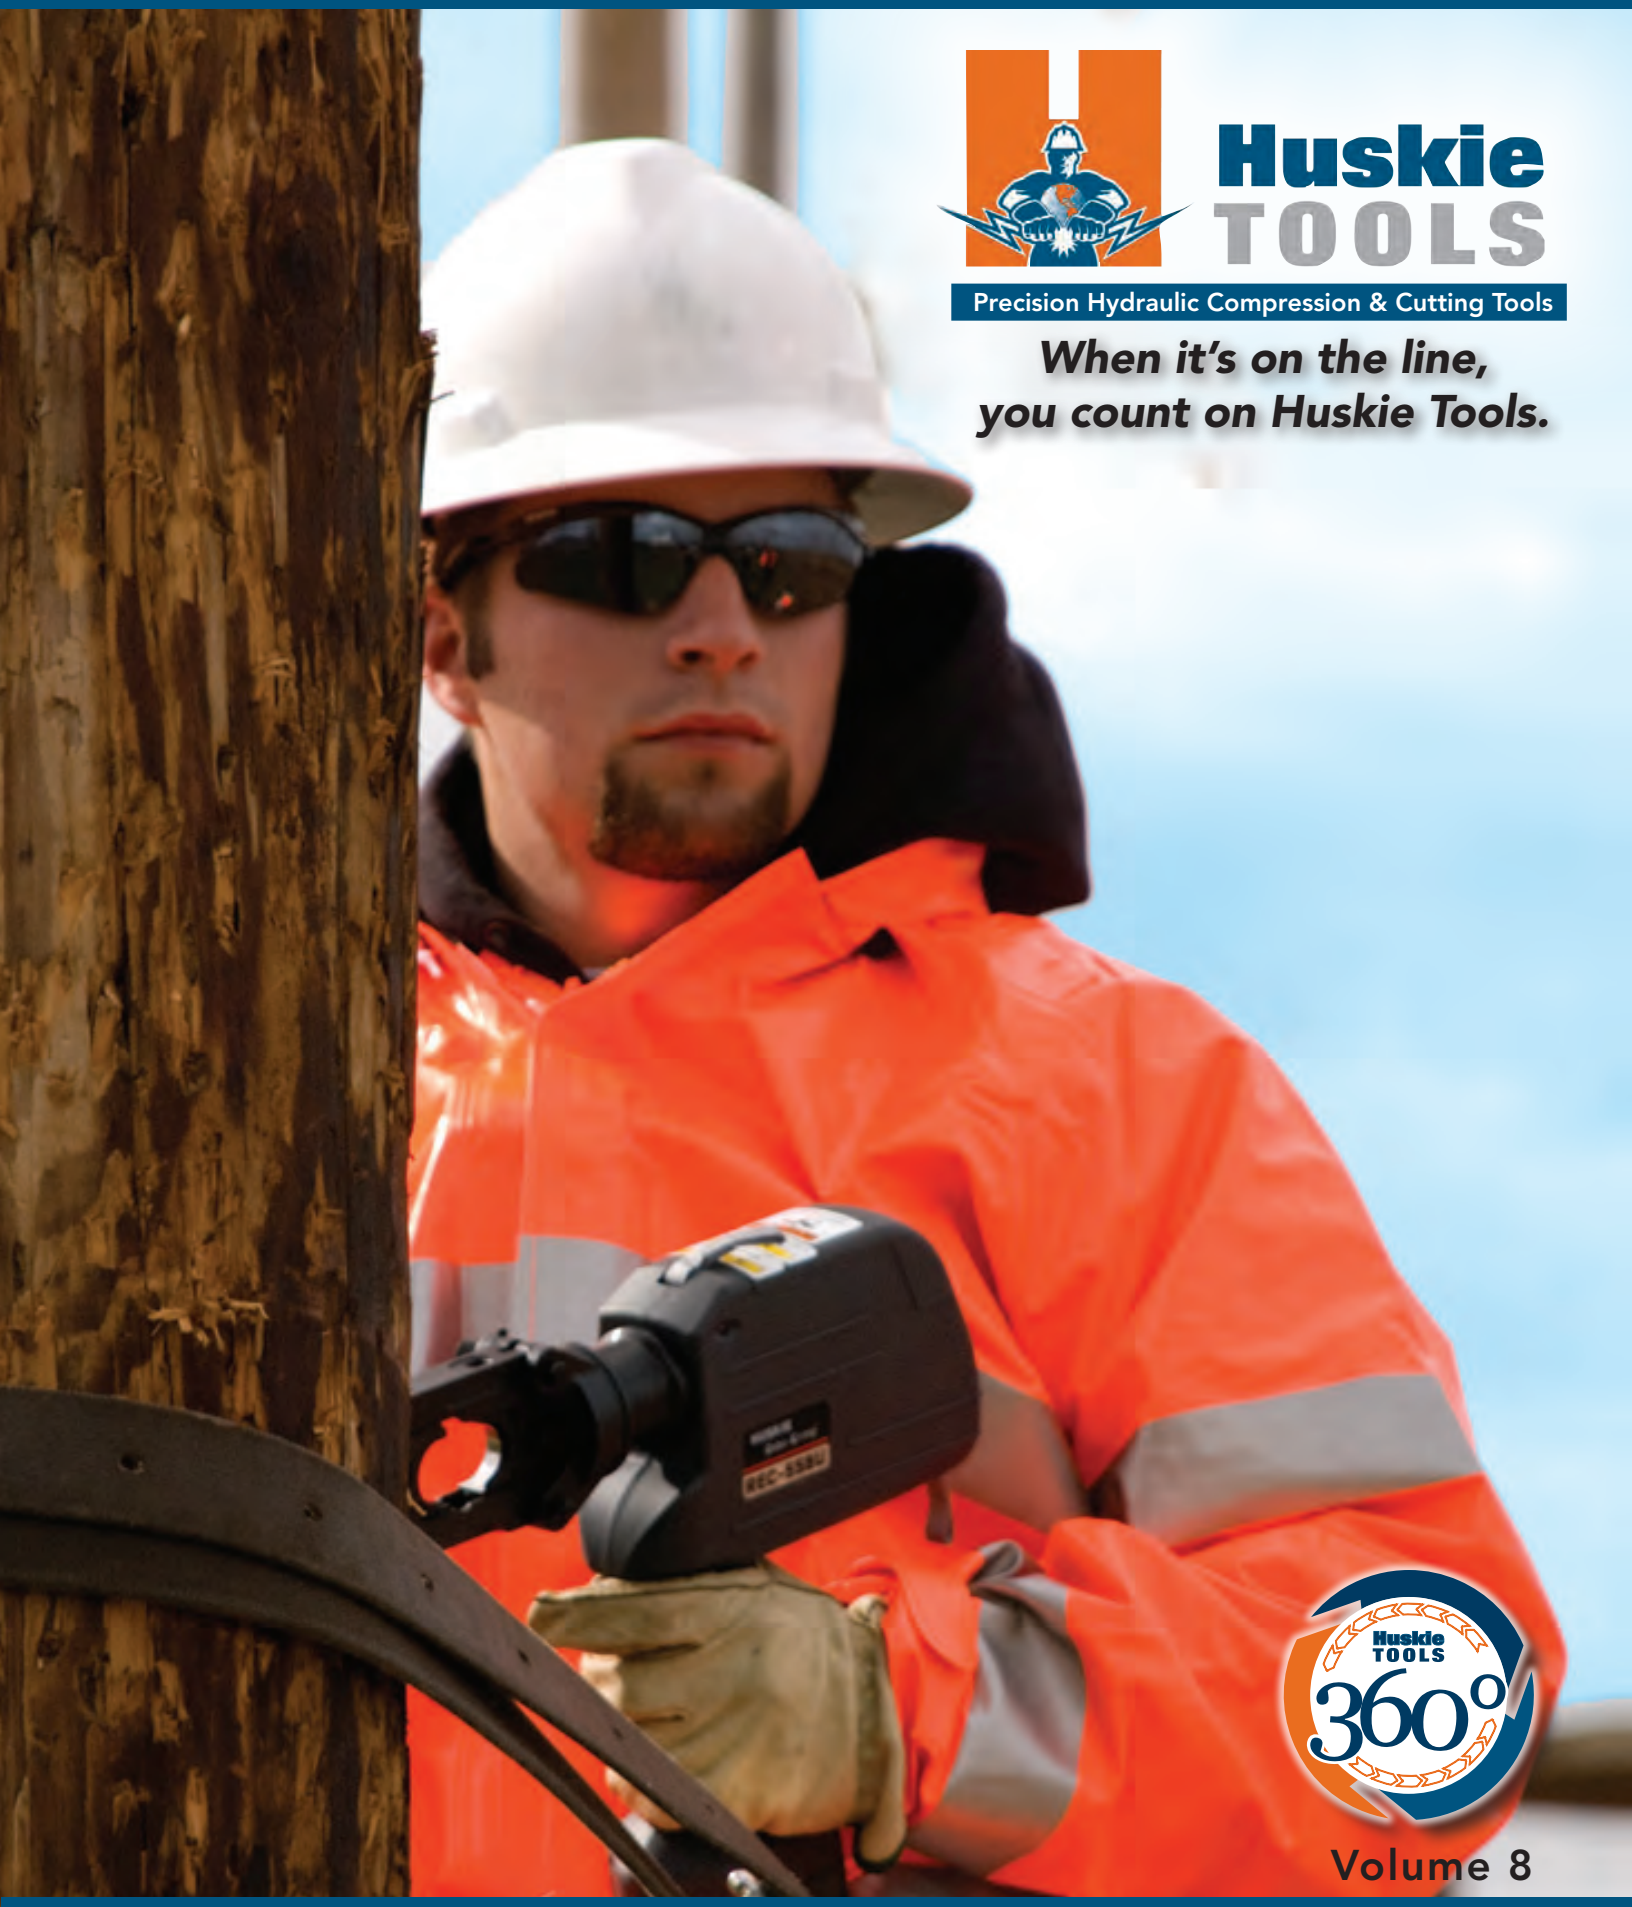

Huskie TOOLS

Precision Hydraulic Compression & Cutting Tools

When it's on the line, you count on Huskie Tools.

Huskie TOOLS 360°

Volume 8

www.huskietools.com

Follow Us:

@huskietoolsinc

linkedin.com/company/huskie-tools

youtube.com/user/huskietools

facebook.com/huskietools

Table of Contents

Battery Operated Tools

SL-ND	6 Ton Streamline Crimping Tool with Changeable Head	13
SL-630	6.2 Ton Streamline Dieless Crimping Tool	14
SL-750	6.2 Ton Streamline Dieless Crimping Tool	15
SL-CB	Streamline Cable Bending Tool	16
SL-S20	6 Ton Streamline Cutting Tool	17
ECO-EZ	6 Ton Compression Tool with Changeable Head	18
REC-558U	6 Ton Compression Tool	21
REC-5NDSL	6 Ton Compression Tool with Changeable Head	22
REC-CN558	6 Ton Compression Tool	23
REC-5630	6.2 Ton Dieless Compression Tool	24
REC-5750	6.2 Ton Flip-Top Dieless Compression Tool	25
REC-3410	12 Ton Compression Tool	26
REC-5430	12 Ton Compression Tool	27
REC-3510	12 Ton Compression Tool	28
REC-5510	12 Ton Compression Tool	29
REC-3510K	12 Ton Compression Tool	30
REC-5510K	12 Ton Compression Tool	31
REC-3610	15 Ton Compression Tool	32
REC-SB	Shear Bolt Wrench	33
REC-530Y	6.6 Ton Cutting Tool	34
REC-534YC	6.6 Ton Cutting Tool	35
REC-560YC	6.6 Ton Scissor-Type Cutting Tool	36
REC-585YC	9 Ton Scissor-Type Cutting Tool	37
REC-50U	Gear-Driven Cable Cutter	38
REC-54ACM	Gear-Driven Cable Cutter	39
REC-54M	Gear-Driven Cable Cutter with Notched Blade	40
REC-Y33	Gear-Driven Scissor Cutter	41
REC-S520	6.6 Ton Battery Powered Cutter	42
REC-S524H	8 Ton Battery Powered Cutter	43
REC-S524CC	8 Ton Cutting Tool	44
REC-S540	8 Ton Cutting Tool	45
REC-S3550	13 Ton Cutting Tool	46
REC-P1	10,000 psi Battery Powered 28.8 Volt Pump	47

Hydraulic Compression Tools

CN-258	6 Ton Compression Tool	53
EP-630A	6.2 Ton Dieless Crimping Tool	53
EP-750A	6.2 Ton Flip-Top Dieless Crimping Tool	54
EP-410	12 Ton Compression Tool with Rubber Boot	54
EP-430	12 Ton Compression Tool with Rubber Boot	55
EP-510C	12 Ton Compression Tool with Rubber Boot	55
EP-510K	12 Ton Compression Tool with Rubber Boot	56
CN-58H	6 Ton Remote Compression C-Head	56
EP-630HA	6.2 Ton Dieless Remote Crimping Head	57
EP-750HA	6.2 Ton Flip-Top Dieless Remote Crimping Head	57
EP-410H	12 Ton Remote Compression C-Head	58
EP-410HT	12 Ton Remote Titanium Compression C-Head	58
EP-430H	12 Ton Remote Compression C-Head	59
EP-510HC	12 Ton Remote Compression C-Head	59
EP-510HK	12 Ton Remote Compression C-Head	60
EP-610H	15 Ton Remote Compression C-Head	60
EP-60W (Steel), EP-60WT (Titanium)	60 Ton Compression Head	61
EP-60D (Steel), EP-60DT (Titanium)	60 Ton Double Acting Compression Head	62
EP-100WC	100 and 200 Ton Compression Head	63
HT58-SERIES	4-6 Ton "W" Style Dies	64
HT-SERIES	4-6 Ton "O" Style Dies	64
HT41-SERIES	12 Ton "U" Style Dies	65
HTK-SERIES	10.7-12 Ton "WH-2" and "WH-3" Style Dies	66
HT61-SERIES	15 Ton "P" Style Dies	66
HA60-SERIES	60 Ton Dies	67
HA100-SERIES	100 Ton Dies	67
Huskie Tools Die Chart		68
Wire Rope Dies	12 Ton "U" Type Compression Dies	69
HTK-CASE, DIE-CASE & W-CASE	Die Cases	69
Gauges		70

Hydraulic & Manual Cutting Tools

RI-500	Ratchet Cable Cutter	73
R-750C	Ratchet Cable Cutter	73
S-SERIES	Handheld Hydraulic Cutters	75
SP-SERIES	Hydraulic Operated Remote Cutting Heads	77
YSP-Series	Scissor Cutter Remote Heads	78
DA-12	Hydraulic Low Pressure 4" Cable Cutter	79
AS-025 & AS-118	Cable Stripper for Semi-con and Secondary	80
NP-400	Insulation Stripper	80

Hydraulic Pumps & Punches

HP-700	10,000 psi Hydraulic Hand Pump	83
FP-700	10,000 psi Hydraulic Foot Pump	83
R-14EF	1/2 HP, 10,000 psi Hydraulic Pump	84
R-14EA	3/4 HP, 10,000 psi Single Acting Hydraulic Pump	84
R-14EAD	3/4 HP, 10,000 psi Double Acting Hydraulic Pump	85
HPG-4	4 HP, Gas Engine 10,000 psi Hydraulic Pump	85

Phone: 800-860-6170
Fax: 800-345-3767

Table of Contents

REC-P1	10,000 psi Battery Powered 28.8 Volt Pump	86
SH-70M	35 Ton Hydraulic Steel Punch	87
URH-14	Remote Control Handle	88
FS-14	Foot Switch	88
NC-SERIES	10,000 psi High Pressure Hydraulic Hose	89
SC-SERIES	10,000 psi High Pressure Flush Face Couplers	89
Hydraulic Oil		90

Additional Tooling and Accessories

ECO-L90	LED Light	92
EZ-HLSTR/SL-HLSTR	Huskie Tools Holster	92
25CAT	Optional Cutter Head Attachment for REC-558U	93
UDK-1 & PU-15	"U" Die Adapters	93
REC-P1CASE	Steel Carrying Case	94
Cutting Tool Selection Guide		95
Compression Tool Selection Guide		95
ACSR Cutting Guide		96
360° of Sales, Service and After Market Products		97-106
Huskie Tools Representative Directory		107-109
Authorized Service Centers		109
Index		110-111

Huskie TOOLS

Precision Hydraulic Compression and Cutting Tools

Huskie Tools Headquarters
Glendale Heights, IL

The Huskie Tools Quality Advantage

Huskie Tools Ambassador
Clyde Legg, General Foreman
Company: Davis H. Elliot
Dayton, OH

Clyde holds the REC-S540.

Tools that make your job easier, reduce the risk of injury, and minimize worker downtime.

"INSIST *on the best"*

Huskie TOOLS

VERSATILE
Small, portable Huskie Tools hydraulic cutters and compression tools eliminate the cost and labor time required for cartage and set up of cumbersome equipment. Huskie Tools products reduce labor costs because they work faster. You save money on maintenance because our tools last for years with minimal maintenance. You also save the purchase, replacement, and maintenance costs of all the tools just one Huskie Tools product replaces.

CONVENIENT
Self-contained Huskie hydraulic tools are lightweight, portable, and user-friendly. No set up time is required. They cut with amazing speed and are ideal for close quarters, manholes, trenches, underwater, and in other environments where acetylene torches, electric cutters, and larger tools cannot be used. Their versatility makes them advantageous for a wide variety of applications.

SAFE
Hydraulic tools eliminate many risks of injury that are associated with conventional tools. The hydraulic mechanism does the work so there is little risk of continual strain on one muscle or group of muscles that could lead to injuries, lost time from work, or costly medical treatment.

QUALITY
Because of Huskie Tools' superior research and development programs, most of our tools have no competition. Each one is engineered for maximum user efficiency, convenience, and versatility. Our superior technology has led us to a whole new era of robotic cutting and compression tools such as the battery operated REC-3410 and REC-S520 which allow for one man operation. Huskie Tools products are engineered for rugged use and long life. That's why we back them 100% – Huskie's Quality Advantage. Huskie Tools hydraulic tools are manufactured under the strict standards of ISO9001.

WARRANTY POLICY
Huskie Tools products carry a warranty that makes us a leader in the tool industry. No other manufacturer dares to back its tools as we do.

All Huskie Tools SL-SERIES and REC-SERIES battery operated products carry a 5 year warranty. The ECO-SERIES battery operated products carry a 3 year or a 1 year warranty. The BP-80 batteries carry a 5 year or 1,000 recharge cycles warranty from the date stamped on the battery. All other Huskie Tools products carry a 5 year warranty.

Huskie Tools reserves the right to determine all warranty claims. Huskie Tools will not warranty tools containing parts or batteries not originally supplied by Huskie Tools. Failure due to misuse, abuse or repairs attempted by anyone other than Huskie Tools, Inc., or an authorized service center render this warranty null and void.

All factory repaired or reconditioned hydraulic tools carry a one year warranty on parts and labor.

REPAIR & WARRANTY CLAIMS
All claims must be sent to Huskie for inspection and authorization. Before shipping tools to Huskie, a Repair Goods Authorization is required. Secure the authorization online, by telephone or write to Huskie Tools's main office with details of claim. Non-warranty repairs are handled using the same procedure. **Repairs exceeding 50% of the cost of a new tool will be advised before repairs are made.**

For Part Numbers, please visit huskietools.com and click on Huskie Documentation.

PAYMENT TERMS
Upon credit approval Huskie Tools standard payment terms are net-30 days.

FREIGHT
All Huskie Tools products are FOB, Glendale Heights, Illinois. Goods will be shipped pre-paid and added, unless otherwise specified. Freight shipments over $17,000 are prepaid.

COMPLETE SUPPORT SERVICES
Our customers have direct access to us for training, service, and problem solving. As specialists in tools, we maintain a trained repair staff and a large stock of parts. This contrasts with many tool suppliers who carry tools as a sideline without offering support services.

* Quick delivery. We maintain inventory at our headquarters.
* Training and trouble-shooting services.
* Fast repair service.
* Design and engineering service for special tool needs.
* (800) 860-6170 Phone
  (800) 345-3767 FAX
* info@huskietools.com
* Website: www.huskietools.com

Robo Battery Operated Tools

All For One,

All for One, One for All

One Huskie Tools 14.4 Volt Battery allows you to operate all of our ROBO Battery Powered Cutting and Crimping tools.

REC-5NDSL
P. 22

REC-5630
P. 24

REC-5750
P. 25

REC-5510K
P. 31

REC-558U
P. 21

REC-5430
P. 27

REC-3510
P. 28

REC-3610
P. 32

REC-5510
P. 29

REC-CN558
P. 23

REC-3510K
P. 30

SL-ND
P. 13

SL-CB
P. 16

SL-750
P. 15

SL-630
P. 14

REC-3410
P. 26

ECO-EZ
P. 18

Phone: 800-860-6170
Fax: 800-345-3767

One For All.

REC-530Y
P. 34

REC-560YC
P. 36

REC-S520
P. 42

REC-534YC
P. 35

REC-585YC
P. 37

REC-S524H
P. 43

REC-S524CC
P. 44

REC-S540
P. 45

REC-S3550
P. 46

SL-S20
P. 17

REC-54M
P. 40

REC-50U
P. 38

REC-54ACM
P. 39

REC-Y33
P. 41

Order Data

Standard ROBO*Kits

NOTE: Pricing will vary according to tool kit combination.

SL-ND ROBO*CRIMP™	6 Ton Streamline Crimping Tool with Changeable Head	13
SL-630 ROBO*CRIMP™	6.2 Ton Streamline Dieless Crimping Tool	14
SL-750 ROBO*CRIMP™	6.2 Ton Streamline Dieless Crimping Tool	15
SL-CB ROBO*BEND™	Streamline Cable Bending Tool	16
SL-S20 ROBO*CUT™	6 Ton Streamline Cutting Tool with .75" Jaw Opening	17
ECO-EZ ROBO*CRIMP™	6 Ton Compression Tool with Changeable Head	18
REC-558U ROBO*CRIMP™	6 Ton Compression Tool with 1.8" Jaw Opening	21
REC-5NDSL ROBO*CRIMP™	6 Ton Compression Tool with Changeable Head and 1-3/8" Jaw Opening	22
REC-CN558 ROBO*CRIMP™	6 Ton Compression Tool with .95" Jaw Opening	23
REC-5630 ROBO*CRIMP™	6.2 Ton Dieless Compression Tool with .90" Jaw Opening	24
REC-5750 ROBO*CRIMP™	6.2 Ton Flip-Top Dieless Compression Tool with 1.5" Opening	25
REC-3410 ROBO*CRIMP™	12 Ton Compression Tool with 1" Jaw Opening	26
REC-5430 ROBO*CRIMP™	12 Ton Compression Tool with 1-3/16" Jaw Opening	27
REC-3510 ROBO*CRIMP™	12 Ton Compression Tool with 1.65" Jaw Opening	28
REC-5510 ROBO*CRIMP™	12 Ton Compression Tool with 1.65" Jaw Opening	29
REC-3510K ROBO*CRIMP™	12 Ton Compression Tool with 1.5" Jaw Opening	30
REC-5510K ROBO*CRIMP™	12 Ton Compression Tool with 1.5" Jaw Opening	31
REC-3610 ROBO*CRIMP™	15 Ton Compression Tool with 2" Jaw Opening	32
REC-SB	Shear Bolt Wrench	33
REC-530Y ROBO*CUT™	6.6 Ton Cutting Tool with 1-3/16" Jaw Opening	34
REC-534YC ROBO*CUT™	6.6 Ton Cutting Tool with 1-3/8" Jaw Opening	35
REC-560YC ROBO*CUT™	6.6 Ton Scissor-Type Cutting Tool with 2.5" Jaw Opening	36
REC-585YC ROBO*CUT™	9 Ton Scissor-Type Cutting Tool with 3.3" Jaw Opening	37
REC-50U ROBO*SLICE™	Gear-Driven Cable Cutter with 2" Jaw Opening	38
REC-54ACM ROBO*SLICE™	Gear-Driven Cable Cutter with 2-1/8" Jaw Opening	39
REC-54M ROBO*SLICE™	Gear-Driven Cable Cutter with Notched Blade and 2-1/8" Jaw Opening	40
REC-Y33 ROBO*SLICE™	Gear-Driven Scissor Cutter with 1-1/4" Jaw Opening	41
REC-S520 ROBO*CUT™	6.6 Ton Battery Powered Cutter with .75" Jaw Opening	42
REC-S524H ROBO*CUT™	8 Ton Battery Powered Cutter with .95" Jaw Opening	43
REC-S524CC ROBO*CUT™	8 Ton Cutting Tool with .95" Jaw Opening	44
REC-S540 ROBO*CUT™	8 Ton Cutting Tool with .6" Jaw Opening	45
REC-S3550 ROBO*CUT™	13 Ton Cutting Tool with 2" Jaw Opening	46
REC-P1 ROBO*PUMP	10,000 psi Battery Powered 28.8 Volt Pump	47

Standard ROBO*Kits Include

1 Battery Powered Tool
1 Carrying Case
1 CH-90 Tri-Chemistry Charger
2 BP-80 Lithium Ion Batteries
1 Carrying Strap

Battery and Charger:

BP-80 Huskie Tools Lithium Ion Battery
CH-90 Huskie Tools Tri-Chemistry Charger
This charger can charge the BP-80 and ALL previous Huskie Tools batteries, including the BP-70, BP-70EI and the BP-70MH.

Phone: 800-860-6170
Fax: 800-345-3767

SL-Line

Battery Operated Tools

Huskie Tools Booth
ICUEE 2011

SL-ND
Pg. 13

SL-CB
Pg. 16

ECO-EZ
Pg. 18

SL-S20
Pg. 17

Compression Tools-REC Line
Pgs. 21-33

Cutting Tools-REC Line
Pgs. 34-46

Dieless SL Tools
Pg. 14-15

Phone: 800-860-6170
Fax: 800-345-3767

SL-ND ROBO*CRIMP™

6 Ton Streamline Crimping Tool with Changeable Head

Accepts "W", "O" and "X" Type Dies
• See Page 64

Specifications	
Output	6 Ton
Weight	8 lbs. with Battery
Length	22"

Crimping Estimates	
	BP-80
4/0-4/0 H-Tap	100

Connector Range	
Lugs and Splices	#8-500 MCM Cu #8-350 MCM Al
H-Taps	Up to 4/0-4/0

Cutting Capacities with SLCUT-JAW	
ACSR	Up to 4/0
Standard Guy Wire	3/8"
Soft Locks	3/8"
Soft Steel Bolts	3/8"

Features

- Forged Jaws for Long Life
- Brush Protection Standard on All Jaws
- New Pull-Pin Design for Quick Jaw Change
- Bright White, LED Lights for Working in Low Light Conditions
- Three Compression Heads-ND, O, and BG
- One Hand Operation
- One Cutting Jaw For ACSR, Guy Wire & Bolts
- Rotational Head
- Audible Bypass when Predetermined Pressure is Achieved
- Tested Up To 75kV
- 5 Year Warranty on Tool, Battery & Charger

SLND-JAW SLBG-JAW SLO-JAW SLCUT-JAW

SLCB-JAW
See Page 16 for SL-CB

Optional Accessories	
SL-HLSTR	Huskie Tools Holster

The **SL-ND** was developed after listening to feedback from of our customers for a more robust, higher-quality, REC-style streamline tool. This new tool platform is the culmination of almost three years of research and development and will stand up to the most demanding tasks that linemen face every day.

The SL has a choice of five jaw types, including three compression heads, the SLND-JAW, SLO-JAW, or SLBG-JAW. The SLND-JAW head combines ND and K jaws. For cutting, switch to the SLCUT-JAW and for bending, use the SLCB-JAW. Quickly change between head types with the pull-pin design.

No need for another battery system, as this tool operates on the same 14.4 volt battery used in all of the Huskie Robo tools. The SL-ND Streamline tool not only carries a 5 year warranty on the tool but on the battery and charger as well.

For additional ordering information, please refer to page 10.

SL-630 ROBO*CRIMP™

6.2 Ton Streamline Dieless Crimping Tool with .9" Jaw Opening

Specifications	
Output	6.2 Tons
Weight	10.5 lbs. with Battery
Length	21.5"
Jaw Opening	.9"

Crimping Estimates	
	BP-80
1/0 Cu	90
500 MCM Cu	110

*Connector Range	
Lugs and Splices	#6 AWG-500 MCM

Features

- Tested Up to 75kV
- Rotational Head
- Weather Resistant Housing
- Bright White, LED Lights for Working in Low Light Conditions
- Audible Bypass when Predetermined Pressure is Achieved
- *Designed to crimp Anderson connectors & other brand connectors manufactured to ANSI C119.4
- Eliminates the Need for Dies
- 5 Year Warranty on Tool, Battery & Charger

LED lights on both sides of tool

The **SL-630** is a battery operated, dieless compression tool used to compress Anderson style lugs. 6.2 tons of compression force is achieved when the tool advances and bypasses at the predetermined pressure. Advance and retract buttons on the tool handle allow for one hand operation, freeing the other hand to maneuver the cable.

NOTE: Both the SL-630 and SL-750 are designed to crimp Anderson Style connectors. Other brand connectors manufactured to ANSI specifications C119.4 can be used. For range-taking connectors, the cable must be maximum size specified for the connector. Consult your connector manufacturer for dieless applications.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

SL-750 ROBO*CRIMP™

6.2 Ton Streamline Dieless Crimping Tool with 1.5" Jaw Opening

LED lights on both sides of tool

Specifications	
Output	6.2 Tons
Weight	10.5 lbs. with Battery
Length	21.5"
Jaw Opening	1.5"

Crimping Estimates	
	BP-80
1/0 Cu	90
500 MCM Cu	110

*Connector Range for SL-750	
Lugs and Splices	#6 AWG-750 MCM

Features

- Tested Up to 75kV
- Rotational Head
- Weather Resistant Housing
- Bright White, LED Lights for Working in Low Light Conditions
- Audible Bypass when Predetermined Pressure is Achieved
- *Designed to crimp Anderson connectors & other brand connectors manufactured to ANSI C119.4
- Flip-Top Head Design
- Eliminates the Need for Dies
- 5 Year Warranty on Tool, Battery & Charger

The **SL-750** is a flip-top, dieless tool used to crimp cables up to 750 MCM. The flip top latch opens to allow for easy cable positioning and removal. The dieless system is used for non-tension splices and terminations. There is one stationary and three movable indenting nibs which close at 90° angles to each other so that the connector is squeezed equally at four strategic points with 6 tons of force. The top can be unlatched to accommodate larger size lugs and cables up to 750 MCM. Typical applications include in-line splicing connectors and lug terminations.

NOTE: Both tools are designed to crimp Anderson Style connectors. Other brand connectors manufactured to ANSI specifications C119.4 can be used. For range-taking connectors, the cable must be maximum size specified for the connector. Consult your connector manufacturer for dieless applications.

For additional ordering information, please refer to page 10.

SL-CB ROBO*BEND™

Streamline Cable Bending Tool

Specifications	
Weight	12 lbs. with Battery
Size	7"L X 14"W X 22"H
Bending Estimates	
Consult Factory	
Bending Capacity	
Cable	1000 MCM Cu *For Larger Cable, Consult Factory*

Features

- New Pull-Pin Design for Quick Jaw Change
- Bright White, LED Lights for Working in Low Light Conditions
- Audible Bypass when Predetermined Pressure is Achieved
- Tested Up To 75kV
- 5 Year Warranty on Tool, Battery & Charger

SLCB-JAW

See Page 13 for Jaw Only

LED lights on both sides of tool

Huskie Tools is pleased to introduce the **SL-CB**, the first of its kind in the electrical utility industry, is a battery powered cable bender. The SL-CB utilized the pull-pin design, allowing technicians to change jaws from compression, to cutting, to cable bending. The SL-CB is just one of the many ergonomic solutions, provided by Huskie Tools, to help reduce strains and sprains associated with the daily tasks of a powerline technician. The SL-CB has several different settings, so the tool can be used on either secondary or primary conductor in a variety of sizes. Featuring a low profile, the SL-CB can be used in a variety of close-quarter environments; such as underground vaults, meter bases and substation applications and wherever cable bending is required.

NOTE: Contact cable manufacturer for specified cable bending radii and cable bending requirements.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

SL-S20 ROBO*CUT™

6 Ton Streamline Cutting Tool with .75" Jaw Opening

LED lights on both sides of tool

The **SL-S20** was designed to cut the toughest steel used in construction today. It can replace an entire tool kit, including several sizes of conventional bolt cutters, hacksaws, acetylene torches and cable cutters.

With the pull of a trigger, you can cut ACSR cables up to 477, standard guy wires to 3/8", and ground rods to 1/2". The specially designed flip-top latch and rotating head provide exceptional ease of use and maneuverability in tight working quarters.

For additional ordering information, please refer to page 10.

Specifications	
Output	6 Ton
Weight	6 lbs. with Battery
Size	19"
Jaw Opening	.75"

Cutting Estimates	BP-80
336 ACSR	90
1/2" Wire Rope	90
1/2" Rebar	60
1/2" Ground Rod	60
3/8" Guy Wire	45

Cutting Capacities	
Wire Rope	5/8"
Rebar (Sc 40)	1/2"
Rebar (Sc 60)	3/8"
Ground Rod	1/2"
ACSR	477 MCM
Guy Wire	3/8"

Features

- Flip-Top Latching Head
- Tested Up to 75kV
- One Hand Operation
- Rotational Head
- Rapid Advance
- 5 Year Warranty on Tool, Battery & Charger

Optional Accessories	
SL-HLSTR	Huskie Holster

ECO-EZ ROBO*CRIMP™

6 Ton Compression Tool with Changeable Head

Specifications	
Output	6 Ton
Weight	6 lbs. with Battery
Length	20.5"

Crimping Estimates	
	BP-80
4/0-4/0 H-Tap	100

Connector Range	
Lugs and Splices	#8-500 MCM Cu #8-300 MCM Al
H-Taps	Up to 4/0-4/0

Cutting Capacities with RBC-38	
ACSR	Up to 4/0
Standard Guy Wire	3/8"
Soft Locks	3/8"
Soft Steel Bolts	3/8"

Features

- 6 Heads to Choose From
- Accepts All "W" & "X" Type Dies
- One Hand Operation
- Rotational Head
- Audible Bypass when Predetermined Pressure is Achieved
- Tested Up To 75kV
- 6 Ton Output
- Compatible with All Huskie 14.4V Batteries
- Brush Protection Guards

Optional Accessories	
HT58CUT	Cutter Dies
EZJAW-COVER	Brush Protection Guards
EZ-HLSTR	Huskie Holster

Brush Protection Guards

Pull-Pin Design
Optional-EZ-97

The **ECO-EZ** Streamline compression tool has a powerful 6 ton output. When ordering, choose from any of the six available heads that meet your needs and switch between multiple heads with the pull-pin design. The swivel head design allows the jaws to rotate mo 180° for operator convenience.

No need for another battery system. This tool operates on the same 14.4 volt battery used in all of the Huskie Robo tools. Just like the rest of our battery tools, energized lines will not effect the operation or performance of the tool.

For additional ordering information, please refer to page 10.

Only EZK jaws accept Kearney "O" type dies. All others accept "W" and "X".

Phone: 800-860-6170
Fax: 800-345-3767

It's time
for
Huskie
TOOLS

REC-LINE

REC-558U ROBO*CRIMP™

6 Ton Compression Tool with 1.8" Jaw Opening

Accepts "W", "O" and "X" Type Dies

• *See Page 64 for Available Huskie Dies*

Specifications	
Output	6 Ton
Weight	8 lbs. with Battery
Size	13"L x 12"H x 2.5"W
Jaw Opening	1.8"

Crimping Estimates	
	BP-80
#6 Cu/Al	250
1/0 Cu/Al	195
4/0 Cu/Al	150

Connector Range	
Lugs and Splices	#8-500 MCM Cu #8-300 MCM Al
H-Taps	Up to 4/0-4/0

Optional Accessories	
25CAT	Cutter Head, p. 93
HT58CUT	Cutter Die, p.64
ROB-358N	Insulated Jaw

Features

- One Hand Operation
- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- Interchangeable Cutter Head
- 5 Year Warranty on Tool, Battery & Charger

25CAT* (optional) p. 93

* Will not cut ALL 500 MCM copper cable-consult factory.

The **REC-558U** was designed to squeeze commonly used service entrance connectors, including lugs, sleeves, H-Taps and C-Taps. The rapid advance feature allows the operator quicker compression cycles. In addition to the rapid advance feature, it also has incorporated an electronic counter that will allow a service technician to read the number of compression cycles the tool has made. Also, the new tool housing has been reinforced to improve durability during heavy field use.

A factory pre-set bypass cartridge assures a six ton compression every time. The REC-558U accepts either "W", "O" or "X" type dies. The D3 nest die comes standard with the tool. Always consult your connector manufacturer for proper die/connector combinations.

The REC-558U will accept the optional 25CAT cutter head attachment. Quick release pins allow the operator to change between compression and cutter head in one minute with no springs or pins to lose.

For additional ordering information, please refer to page 10.

REC-5NDSL ROBO*CRIMP™

6 Ton Compression Tool with Changeable Head and 1-3/8" Jaw Opening

Accepts "W", "O" and "X" Type Dies
• *See Page 64 for Available Huskie Dies*
Die compatibility varies by jaw.

Specifications	
Output	6 Ton
Weight	9 lbs. with Battery
Size	14"L x 12"H x 2.5"W
Jaw Opening	1-3/8"

Crimping Estimates	
	BP-80
#6 Cu/Al	250
1/0 Cu/Al	200
4/0 Cu/Al	150

Connector Range	
Lugs and Splices	#8-500 MCM Cu #8-300 MCM Al
H-Taps	Up to 4/0-4/0

Cutting Capacities with SLCUT-JAW	
ACSR	Up to 4/0
Standard Guy Wire	3/8"
Soft Locks	3/8"
Soft Steel Bolts	3/8"

Features

- Forged Jaws for Long Life
- Brush Protection Standard on All Jaws
- New Pull-Pin Design for Quick Jaw Change
- One Hand Operation
- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- 4 Heads to Choose From
- 5 Year Warranty on Tool, Battery & Charger

SLND-JAW

SLBG-JAW

SLO-JAW

SLCUT-JAW

The **REC-5NDSL** is the next generation of the REC-5ND tool. The REC-5NDSL has a choice of five jaw types, including three compression heads, the SLND-JAW, SLO-JAW, or SLBG-JAW. The SLND-JAW head combines ND and K jaws. Quickly change between head types with the pull-pin design. All jaw types are forged and come standard with brush protection. Users also have the option of switching to the SLCUT-JAW cutting head.

In addition to the rapid advance feature incorporated into the new REC-5NDSL, it also has an electronic counter that allows a service technician to read the number of compression cycles the tool has made. Also, the tool housing has been reinforced to improve durability during heavy field use.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-CN558 ROBO*CRIMP™

6 Ton Compression Tool with .95" Jaw Opening

Accepts "W", "O" and "X" Type Dies

• *See Page 64 for Available Huskie Dies*

Specifications	
Output	6 Ton
Weight	9 lbs. with Battery
Size	13"L x 12"H x 2.5"W
Jaw Opening	.95"

Crimping Estimates	
	BP-80
#6 Cu/Al	250
1/0 Cu/Al	190
4/0 Cu/Al	150

Connector Range	
Lugs and Splices	#8-500 MCM Cu #8-300 MCM Al
H-Taps	Up to 4/0-4/0

Optional Accessory	
HT58CUT	Cutter Die, p. 64

Features

- One Hand Operation
- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- Open C-Head Design
- 5 Year Warranty on Tool, Battery & Charger

The **REC-CN558** is an open jaw version of the REC-558U latched type tool. The open jaw can easily fit into tight situations where the closing of a jaw latch would be a problem. The jaw is covered with a rubber boot designed to provide some insulated protection against "brush" contact with energized cables. The tool should not be used as an insulated tool since the dies and die holding pins are always exposed.

The head can be turned 180° and positioned to accommodate the operator's work methods. A complete cycled compression is accomplished by the simple squeeze of a trigger. A factory preset by-pass cartridge assures a complete compression every time. Its 6-ton output is equal to any comparable handheld, hydraulic compression tool and far exceeds any mechanical crimper. The REC-CN558 is supplied with D3 nest dies, which can be interchanged with Kearney, or T&B "O" type dies. If you wish to use the Huskie or another brand of "W" type dies, simply slide them over the D3 nest dies and snap in position. The output pressure, of the REC-CN558 can be checked with the PG-15 pressure gauge when necessary.

For additional ordering information, please refer to page 10.

REC-5630 ROBO*CRIMP™

6.2 Ton Dieless Compression Tool with .90" Jaw Opening

Specifications	
Output	6.2 Ton
Weight	11.5 lbs. with Battery
Size	14"L x 13"H x 2.5"W
Jaw Opening	.90"
Center Opening	1.25"
Crimping Estimates	
	BP-80
500 MCM Cu	110
***Connector Range**	
Lugs and Splices	10 AWG-500 MCM

Features

- One Hand Operation
- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- *Designed to crimp Anderson connectors & other brand connectors manufactured to ANSI C119.4
- Eliminates the Need for Dies
- 5 Year Warranty on Tool, Battery & Charger

The **REC-5630** is a battery operated, dieless compression tool used to compress Anderson style lugs. Six tons of compression force are achieved when the tool advances and bypasses at the predetermined pressure. Advance and retract buttons on the tool handle allow for one hand operation, freeing the other hand to maneuver the cable. The REC-5630 is designed to crimp Anderson Style connectors. Other brand connectors manufactured to ANSI specifications C119.4 can be used. For range-taking connectors, the cable must be maximum size specified for the connector. Consult your connector manufacturer for dieless applications.

NOTE: For range taking connectors, the cable must be the maximum size specified for the connector. Consult your connector manufacturer for dieless applications.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-5750 ROBO*CRIMP™

6.2 Ton Flip-Top Dieless Compression Tool with 1.5" Jaw Opening

Specifications	
Output	6.2 Ton
Weight	12 lbs. with Battery
Size	15.5"L x 13"H x 2.5"W
Jaw Opening	1.5"

Crimping Estimates	
	BP-80
1/0 Cu/Al	90
500 MCM Cu	110

*Connector Range	
Lugs and Splices	#6 AWG–750 MCM

Features

- One Hand Operation
- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- *Designed to crimp Anderson connectors & other brand connectors manufactured to ANSI C119.4
- Flip-Top Head Design
- Eliminates the Need for Dies
- 5 Year Warranty on Tool, Battery & Charger

The **REC-5750** is a flip-top, dieless tool used to crimp cables up to 750 MCM. The flip-top latch opens to allow for easy cable positioning and removal. The dieless system is used for non-tension splices and terminations. There is one stationary and three movable indenting nibs which close at 90° angles to each other so that the connector is squeezed equally at four strategic points with 6 tons of force. The top can be unlatched to accommodate larger size lugs and cables up to 750 MCM. Typical applications include in-line splicing connectors and lug terminations. The REC-5750 is designed to crimp Anderson Style connectors. Other brand connectors manufactured to ANSI specifications C119.4 can be used. For range-taking connectors, the cable must be maximum size specified for the connector. Consult your connector manufacturer for dieless applications.

It also has an external bypass cartridge for faster pressure adjustment & repair times.

NOTE: For range taking connectors, the cable must be the maximum size specified for the connector. Consult you connector manufacturer for dieless applications.

For additional ordering information, please refer to page 10.

REC-3410 ROBO*CRIMP™

12 Ton Compression Tool with 1" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	19 lbs. with Battery
Size	18"L x 10.5"H x 3.5"W
Jaw Opening	1"

Crimping Estimates	
	BP-80
4/0 Cu	90
500 MCM Cu	60

Connector Range	
Lugs	#8 AWG - 750 MCM Cu #10 AWG - 750 MCM Al
Splices	#8 AWG - 400 MCM Cu #10 AWG - 400 MCM Al

Features

- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- Includes DIE-CASE
- Protective Rubber Boot on "C" Head For Brush Contact
- 5 Year Warranty on Tool, Battery & Charger

Huskie Tools is giving you more tool speed and easier handling with our **REC-3410** battery powered compression tool. It features a rubber boot and it is designed to accommodate all 12 ton "U" type dies widely used throughout the electrical industry.

The REC-3410 is faster and more compact than our previous model. It offers a wider handle opening with finger grooves, allowing easier access for gloved work. The base of the tool is contoured for stability and incorporates finger grooves for a better grip.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-5430 ROBO*CRIMP™

12 Ton Compression Tool with 1-3/16" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	14.75 lbs. with Battery
Size	15.5"L x 12"H x 3"W
Jaw Opening	1-3/16"

Crimping Estimates	
	BP-80
500 MCM Cu	60
750 MCM Cu	45

Connector Range	
Lugs	750 MCM Cu/Al
Splices	600 MCM Cu/Al

Optional Accessory	
DIE-CASE	Die Case, p. 69

Features

- One Hand Operation
- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- Protective Rubber Boot on "C" Head For Brush Contact
- 5 Year Warranty on Tool, Battery & Charger

The **REC-5430** weighing just 14.75 pounds was specifically designed for use in single-handed operation in overhead applications such as cable trays. This allows one hand to control the work while the other hand is free to operate the tool. It also eliminates the cumbersome hoses and larger, heavier tools traditionally used in overhead work.

The REC-5430 was designed from the same hydraulic system as our REC-558U featuring a rapid advance ram to reduce cycle time. It accepts all 12 ton "U" type dies and is capable of 750 MCM copper lugs and 600 MCM copper splices.

For additional ordering information, please refer to page 10.

REC-3510 ROBO*CRIMP™

12 Ton Compression Tool with 1.65" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	20 lbs. with Battery
Size	19"L x 10.5"H x 3.5"W
Jaw Opening	1.65"

Crimping Estimates	
	BP-80
500 MCM Cu	60
750 MCM Cu	45

Connector Range	
Lugs and Splices	750 MCM Cu/Al

Features

- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- Includes DIE-CASE
- Protective Rubber Boot on "C" Head For Brush Contact
- UL Classified
- 5 Year Warranty on Tool, Battery & Charger

The **REC-3510** is the largest in our line of battery operated 12 ton compression tools. The jaw opening is 1.65" and will accept mid-span copper and aluminum splices and lugs up to 750 MCM Cu/Al. When the sleeves are compressed they can be removed through the large jaw. This tool accepts all "U" type dies available on the market.

A built-in, preset 10,000 psi bypass cartridge will audibly bypass when optimal pressure is achieved. Test dies accompanied with our PG-4 can confirm the output pressure when needed. The output pressure can be adjusted via a bypass port located at the top of the tool. This tool has the most universal range of all our self-contained ROBO* tools.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-5510 ROBO*CRIMP™

12 Ton Compression Tool with 1.65" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	15 lbs. with Battery
Size	16"L x 12"H x 3"W
Jaw Opening	1.65"

Crimping Estimates	
	BP-80
4/0 Cu	90
500 MCM Cu	60

Connector Range	
Lugs and Splices	Up to 750 MCM Cu/Al

Optional Accessory	
DIE-CASE	Die Case, p. 69

Features

- One Hand Operation
- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- Protective Rubber Boot on "C" Head For Brush Contact
- 5 Year Warranty on Tool, Battery & Charger

The **REC-5510** was specifically designed for use in single-handed operation in overhead applications such as cable trays. This allows one hand to control the work while the other hand is free to operate the tool. It also eliminates the cumbersome hoses and larger, heavier tools traditionally used in overhead work.

The REC-5510 has the same jaw opening as our REC-3510 battery operated 12-ton compression tool. The opening is 1.65" which will accept mid-span copper and aluminum splices and lugs up to 750 MCM Cu/Al. This tool accepts all "U" type dies available on the market.

Portability and handling are made easier because the REC-5510 system is self-contained and compact. The new rapid advance system reduces tool run time, giving you more crimp cycles per battery charge. A built-in, pre-set 10,000 psi bypass cartridge will audibly "bypass" when the optimal pressure is achieved.

For additional ordering information, please refer to page 10.

REC-3510K ROBO*CRIMP™

12 Ton Compression Tool with 1.5" Jaw Opening

Accepts "WH-2", PH-2" and "WH-3" Type Dies
• *See Page 66 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	20 lbs. with Battery
Size	19"L x 10.5"H x 3.5"W
Jaw Opening	1.5"

Crimping Estimates	
	BP-80
500 MCM Cu	70
750 MCM Cu	55

Connector Range	
Lugs	1033 ACSR
Splices	477 ACSR

Features

- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- Includes DIE-CASE
- Protective Rubber Boot on "C" Head For Brush Contact
- 5 Year Warranty on Tool, Battery & Charger

Optional Accessories	
UDK-1	"U" Die Adapter, p. 93
HTK-CASE	WH-2, PH-2, WH-3 Die Specific Case, p. 69



UDK-1
"U" Die
Adapter

The **REC-3510K** battery powered compression tool is designed to accept Kearney WH-2, PH-2, and WH-3 style dies. It has a full 12 ton capacity and its 1.5" jaw opening accepts lugs up to 1033 MCM.

The upgraded REC-3510K is faster and more compact than our previous model. It offers a wider handle opening with finger grooves, allowing easy access for gloved work. The base of the tool is contoured for stability and incorporates finger grooves for a better grip.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-5510K ROBO*CRIMP™

12 Ton Compression Tool with 1.5" Jaw Opening

Accepts "WH-2", PH-2" and "WH-3" Type Dies
• *See Page 66 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	16.5 lbs. with Battery
Size	16"L x 12"H x 3"W
Jaw Opening	1.5"

Crimping Estimates	
	BP-80
500 MCM Cu	60
750 MCM Cu	45

Connector Range	
Lugs	1033 ACSR
Splices	477 ACSR

Features

- One Hand Operation
- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- Protective Rubber Boot on "C" Head For Brush Contact
- 5 Year Warranty on Tool, Battery & Charger

The **REC-5510K** battery powered compression tool is designed to accept Kearney WH-2, PH-2 and WH-3 style dies. Weighing just 16.5 pounds it was specifically designed for use in single-handed operation in overhead applications such as cable tray. It also eliminates the cumbersome hoses and larger, heavier tools traditionally used in overhead work.

The REC-5510K was designed from the same hydraulic system as our REC-558U featuring a rapid advance ram to reduce cycle time. It has a full 12-ton capacity and its 1.5 inch jaw opening accepts lugs up to 1033 MCM. Compression head rotates 360° for use in any position.

For additional ordering information, please refer to page 10.

Optional Accessories	
UDK-1	"U" Die Adapter, p. 93
HTK-CASE	WH-2, PH-2, WH-3 Die Specific Case, p. 69

UDK-1
"U" Die
Adapter

REC-3610 ROBO*CRIMP™

15 Ton Compression Tool with 2" Jaw Opening

Accepts "P" Type Dies
• *See Page 66 for Available Huskie Dies*

Specifications	
Output	15 Ton
Weight	24 lbs. with Battery
Size	21.5"L x 10.5"H x 3.5"W
Jaw Opening	2"

Crimping Estimates	
	BP-80
1000 MCM Cu	40

Connector Range	
Aluminum	#8 AWG-1250 MCM
Copper	#8 AWG-1500 MCM
H-Tap	Up to 750/750

Features

- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Weather Resistant Housing
- Audible Bypass when Predetermined Pressure is Achieved
- Includes DIE-CASE
- Protective Rubber Boot on Head
- Flip-Top Rotating Head
- External Pressure Adjustment
- 5 Year Warranty on Tool, Battery & Charger

Optional Accessory	
PU-15	"U" Die Adapter, p. 93

PU-15
"U" Die
Adapter

The **REC-3610** is our 15 ton compression tool that is able to crimp splices and lugs up to 1250 MCM aluminum and 1500 MCM copper. The REC-3610 offers a wide handle opening with finger grooves, allowing easy access for gloved work.

The base of the tool is contoured for stability and incorporates finger grooves for a better grip. The tool has a latched head and its pull-out release pin cannot be entirely removed from the jaw. The jaw opens wide to accept all "P" type dies used in the industry today. The PU-15 die adapter is available for use with all 12 ton "U" type dies.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-SB
Shear Bolt Wrench

Specifications	
Weight	5 lbs. with Battery
Size	13.75"L x 7"H x 3"W

Features

- Battery Operated Shear Bolt Wrench for Shear Bolt Connectors
- For Shear Bolt Underground Connectors
- For Connection 2-8 Services in Hand Holes
- Variable Speed to 2,200 rpm, 1/2" Square Drive
- Short Body Length for Tight Space Application
- Well-Balanced and Lightweight
- 48/ft. Pounds of Torque
- Forward and Reverse
- 5 Year Warranty on Tool, Battery & Charger

The **REC-SB** is a battery operated shear bolt wrench especially designed to torque down and shear the bolts for electrical connection use. The tool features a unique shape to reduce its length for easy access to tight spaces. It has 48 ft./lbs. of torque and features variable speeds up to 2,200 rpm.

For additional ordering information, please refer to page 10.

REC-530Y ROBO*CUT™

6.6 Ton Cutting Tool with 1-3/16" Jaw Opening

Specifications	
Output	6.6 Ton
Weight	11.4 lbs. with Battery
Size	15"L x 12"H x 2.5"W
Jaw Opening	1-3/16"

Cutting Estimates	
	BP-80
500 MCM Cu	110

Cutting Capacities	
Bar	DO NOT CUT
ACSR	336 MCM
Copper	500 MCM*
Aluminum	1.18" O.D.
Standard Guy Wire	3/8" Max.

Features

- Open Scissor Jaw for Easy Cable Insertion
- Tested Up to 75kV
- One Hand Operation
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Overload Bypass Protection
- 5 Year Warranty on Tool, Battery & Charger

*Will not cut ALL 500 MCM copper cable-consult factory.

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to "bypass" feature.

The **REC-530Y** was designed to cut ACSR cables up to 336 MCM, as well as copper cables up to 500 MCM and aluminum cables up to 1.18" outside diameter.

The hydraulic system features a rapid advance for reduced cycle times. All cuts are clean with a minimal amount of cable distortion, which allows for easy connector installation on cables. The open "C" type jaw is very convenient for the operator when reaching out to cut cable opposed to latching the cutter jaw around the cable. The head can be rotated 180° for greater maneuverability in tight working quarters. The keeper plate on the REC-530Y prevents jaws from spreading apart when cutting ACSR.

NOTE: This tool is not recommended for cutting 4/0 Penguin or 3/0 Pigeon ACSR Cables, see cutting guide on page 96.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-534YC ROBO*CUT™

6.6 Ton Cutting Tool with 1-3/8" Jaw Opening

Specifications	
Output	6.6 Ton
Weight	11 lbs. with Battery
Size	15"L x 12"H x 2.5"W
Jaw Opening	1-3/8"

Cutting Estimates	
	BP-80
500 MCM Cu	130
750 MCM Cu	90

Cutting Capacities	
ACSR	DO NOT CUT
Copper	800 MCM
Aluminum	1.4" O.D.

Features

- Open Scissor Jaw for Easy Cable Insertion
- Tested Up to 75kV
- One Hand Operation
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Overload Bypass Protection
- For Copper and Aluminum Only
- 5 Year Warranty on Tool, Battery & Charger

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to "bypass" feature.

Large copper cable cutting is finally made easy with the **REC-534YC** – just pull the trigger and 6.6 tons immediately goes to work for you. The hydraulic system now features a rapid advance for reduced cycle times. This tool is similar to the REC-530Y, but has a slightly larger jaw opening without a "keeper" guard. Its sharp blades are rated for copper and aluminum cables only, up to 800 MCM or 1.4" Al outside diameter.

The open "C" type jaw is very convenient for the operator when reaching out to cut cable, as opposed to latching a cutting jaw around the cable. The jaws will accept a maximum of 800 MCM copper or aluminum cables up to 1.4." Distortion of the cable is minimal and cables can still be sleeved easily. Once the cable is severed, the cutter blades can be opened by the push of the release trigger located below the activation trigger – one finger is all that is needed to cut and release the tool.

NOTE: DO NOT CUT STEEL.

For additional ordering information, please refer to page 10.

REC-560YC ROBO*CUT™

6.6 Ton Scissor-Type Cutting Tool with 2.5" Jaw Opening

Specifications	
Output	6.6 Ton
Weight	11.2 lbs. with Battery
Size	16"L x 12"H x 2.5"W
Jaw Opening	2.5"

Cutting Estimates	
	BP-80
500 MCM Al	130
500 MCM Cu	110

Cutting Capacities	
ACSR	DO NOT CUT
Copper	500 MCM*
Aluminum	2" O.D.

Features

- Open Scissor Jaw for Easy Cable Insertion
- Tested Up to 75kV
- One Hand Operation
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Overload Bypass Protection
- Specifically Designed to Cut Large Jacketed Underground Cable
- For Copper and Aluminum Only
- 5 Year Warranty on Tool, Battery & Charger

*Will not cut ALL 500 MCM copper cable-consult factory.

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to "bypass" feature.

The **REC-560YC** works well for most underground aluminum cable cutting applications. It was designed to cut copper cables up to 500 MCM and aluminum up to 2" maximum outside diameter. The extra wide jaws make cutting the larger diameter underground cables easier. The hydraulic system is designed the same as the REC-558U featuring a rapid advance ram to reduce cycle time.

Because of the larger cutting surface of the blades, the maximum size copper cable that can be cut is 500 MCM. Larger cables will simply cause the cutter to bypass, which is a built-in overload safety device to prevent damage to the tool.

The large jaws can be placed over cables that lie flat on the ground and the cables will be scooped up as the cutting jaws are closed. All cuts are clean so that there is minimal cable distortion for cable sleeving purposes.

NOTE: DO NOT CUT STEEL.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-585YC ROBO*CUT™

9 Ton Scissor-Type Cutting Tool with 3.3" Jaw Opening

Specifications	
Output	9 Ton
Weight	15.5 lbs. with Battery
Size	20"L x 12"H x 8"W
Jaw Opening	3.3"

Cutting Estimates	
	BP-80
1000 MCM Al	60
1000 MCM Cu	90

Cutting Capacities	
ACSR	DO NOT CUT
Aluminum	3"
Telecommunication	3"
Lead Sheath	2.5"

Features

- Open Scissor Jaw for Easy Cable Insertion
- Tested Up to 75kV
- One Hand Operation
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Overload Bypass Protection
- Sidebar Handle for Stability and Balance
- For Copper and Aluminum Only
- 5 Year Warranty on Tool, Battery & Charger

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to "bypass" feature.

The **REC-585YC** is designed to cut copper and aluminum cables as well as lead-sheathed telecommunication cables. The extremely large jaws and scissor-type blades allow for easy cutting of large underground cables. The sidebar handle allows the user to stabilize and balance the tool.

This tool also has a built-in bypass cartridge to avoid cutter damage for those cables that are beyond the cutter's capacity. The open jaw design allows the user to scoop up cables that are against a wall, in hard to reach areas and on the ground.

NOTE: DO NOT CUT STEEL.

For additional ordering information, please refer to page 10.

REC-50U ROBO*SLICE™

Gear-Driven Cable Cutter with 2" Jaw Opening

Specifications	
Weight	6 lbs. with Battery
Size	14.5"L x 4"H x 4.5"W
Jaw Opening	2"

Cutting Estimates	
	BP-80
1000 MCM Cu	40
1500 MCM Al	50

Cutting Capacities	
Aluminum	1500 MCM
Copper	1000 MCM*

Features

- Tested Up to 75kV
- One Hand Operation
- Ergonomically Balanced
- Weather Resistant Housing
- Overload Circuit Breaker Protection
- For Copper and Aluminum Only
- 5 Year Warranty on Tool, Battery & Charger

*Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to overload circuit breaker protection feature.

DO NOT CUT STEEL OR ACSR. Consult factory for more information on cutting copper cable.

The **REC-50U** battery operated slicing tool cuts 2" cable with the touch of a finger. It features a powerful gear reduction motor that pulls a moveable blade through the toughest copper and aluminum cables.

The ROBO*SLICE comfortably fits into the lineman's gloved hand, and repetitive ratcheting movement is entirely eliminated. Just a squeeze of the rocker arm trigger is all it takes to make a cut and almost no muscle power is needed. As a result, the risk of sprains, strains, and lost time due to muscle related injuries can be significantly reduced.

The moveable blade has wide gear teeth for extra power and full cutting traction. Gear guides are attached on both ends of the movable blade to align the gear teeth with the internal pinion gear.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-54ACM ROBO*SLICE™

Gear-Driven Cable Cutter with 2-1/8" Jaw Opening

Specifications	
Weight	7.2 lbs. with Battery
Size	16"L x 4"H x 4.5"W
Jaw Opening	2-1/8"

Cutting Estimates	
	BP-80
1000 MCM Cu	25
1500 MCM Al	30

Cutting Capacities	
Aluminum	1500 MCM
Copper	1000 MCM*

Features

- Improved Ergonomic Handle
- 2-1/8" Jaw Opening
- Cuts up to 1500 MCM Al
- One Hand Operation
- Safety Lockout Switch
- Upgraded Motor and Gear System
- 5 Year Warranty on Tool, Battery & Charger

*Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to overload circuit breaker protection feature.

DO NOT CUT STEEL OR ACSR. Consult factory for more information on cutting copper cable.

The **REC-54ACM** was designed to cut stranded copper cables and aluminum. The jaws will accept a maximum of 1500 MCM aluminum. The operation of this tool is the same as the REC-54M, but it has sharper blades for cutting only non-ferrous materials. Do not cut steel with this model, or blade damage will occur.

The REC-54ACM comfortably fits into the lineman's gloved hand, and repetitive ratcheting movement is entirely eliminated. We have rotated the handle 90° to the blade to achieve a more ergonomic and comfortable cutting position. Just a squeeze of the trigger is all it takes to make a cut and almost no muscle power is needed. As a result, the risk of sprains, strains, and lost time due to muscle related injuries can be significantly reduced.

The moveable blade has wide gear teeth for extra power and full cutting traction. Gear guides are attached on both ends of the movable blade to align the gear teeth with the internal pinion gear.

For additional ordering information, please refer to page 10.

REC-54M ROBO*SLICE™

Gear-Driven Cable Cutter with Notched Blade and 2-1/8" Jaw Opening

Specifications	
Weight	8 lbs. with battery
Size	15.5"L x 4.5"H x 5"W
Jaw Opening	2-1/8"

Cutting Estimates	
	BP-80
1590 MCM ACSR	35+

Cutting Capacities	
Copper	750 MCM
Aluminum	1500 MCM
ACSR	1590 MCM*

Features

- Improved Ergonomic Handle
- 2-1/8" Jaw Opening
- Cuts up to 1500 MCM Al
- One Hand Operation
- Safety Lockout Switch
- Upgraded Motor and Gear System
- 5 Year Warranty on Tool, Battery & Charger

* NOT INTENDED FOR USE ON 795 DRAKE.

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to overload circuit breaker protection feature.

The **REC-54M** is a heavy duty cable cutter primarily used to cut ACSR. It will cut up to 1590 MCM ACSR* and copper cables up to 750 MCM. The large jaw opening will also accommodate aluminum cables up to 1500 MCM. Huskie Tools has notched both cutting blades to avoid the denting of the cutting surfaces when steel strand is encountered. We have rotated the handle 90° to the blade to achieve a more ergonomic and comfortable cutting position.

FOR CLEAN CUTS ON COPPER & ALL ALUMINUM CABLE PLEASE REFER THE REC-50U, REC-54AC & THE REC-54ACM.

This tool also incorporates a blade retainer, which keeps the blades from spreading apart while cutting steel cables. The REC-54M was designed for single and multi-stranded steel cores and aluminum cables. The powerful motor & gear drive allow the operator to cut through the toughest cables with just the pull of the trigger.

NOTE: The REC-54M is not intended to cut guy wires, ground rod or bolts.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-Y33 ROBO*SLICE™

Gear-Driven Scissor Cutter with 1.25" Jaw Opening

Specifications	
Weight	7.2 lbs. with Battery
Size	16"H x 4"L x 4.5"W
Jaw Opening	1.25"

Cutting Estimates	
	BP-80
636 ACSR	60

Cutting Capacities	
Copper	500 MCM*
Aluminum	Up to 1-1/4" O.D.
ACSR	636 MCM

Features

- Tested Up to 75kV
- One Hand Operation
- Ergonomically Balanced
- Weather Resistant Housing
- Overload Circuit Breaker Protection
- 5 Year Warranty on Tool, Battery & Charger

* Consult factory for more information on cutting 500 MCM copper cable.

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to overload circuit breaker protection feature.

The **REC-Y33** cable cutter is used to cut up to 636 ACSR and up to 500 MCM* copper cables. The open jaw makes it easy to insert cables for one handed operation. The jaw, which incorporates a blade retainer, keeps the blade from spreading apart when cutting cable with a steel core.

It features a lock-out switch for reversing the blade direction all-with one handed operation. The powerful gear drive allows the operator to quickly cut some of the toughest cables with ease.

NOTE: The REC-Y33 will not cut guy wire, ground rod anchor rod or bolts.

For additional ordering information, please refer to page 10.

REC-S520 ROBO*CUT™

6.6 Ton Battery Powered Cutter with .75" Jaw Opening

Specifications	
Output	6.6 Ton
Weight	9.5 lbs. with Battery
Size	12"L x 12"H x 2.5"W
Jaw Opening	.75"

Cutting Estimates	
	BP-80
336 ACSR	90
1/2" Wire Rope	90
1/2" Rebar	60
1/2" Ground Rod	60
3/8" Guy Wire	40

Cutting Capacities	
Wire Rope	5/8"
Rebar (Sc 40)	1/2"
Rebar (Sc 60)	3/8"
Ground Rod	1/2"
ACSR	477 MCM
Guy Wire	3/8"

Features

- Flip-Top Latching Head
- Tested Up to 75kV
- One Hand Operation
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Overload Bypass Protection
- 5 Year Warranty on Tool, Battery & Charger

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to "bypass" feature.

20-07
REC-S520 Replacement Blade

The **REC-S520** was designed to cut the toughest steel used in construction today. It can replace an entire tool kit, including several sizes of conventional bolt cutters, hacksaws, acetylene torches and cable cutters. The REC-S520 was designed from the same hydraulic system as the REC-558U featuring a rapid advance ram for reduced cycle times.

With the pull of a trigger, you can cut ACSR cables up to 477, standard guy wires to 3/8", and ground rods to 1/2". The specially designed flip-top latch and rotating head provide exceptional ease of use and maneuverability in tight working quarters. The REC-S520 has an overload bypass that will "kick out" when the tool reaches 6.6 tons or is attempting to cut cables beyond its capacities.

NOTE: DO NOT CUT EHS GUY WIRE OR CASE HARDENED STEEL RODS. SEE REC-S524CC, S-24CC, SP-24CC, S-32CC OR SP-32CC1.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-S524H ROBO*CUT™

8 Ton Battery Powered Cutter with .95" Jaw Opening

The **REC-S524H** was designed to cut the toughest steel used in construction today. It can replace an entire tool kit, including several sizes of conventional bolt cutters, hacksaws, acetylene torches and cable cutters. The REC-S524H was designed from the same hydraulic system as the REC-558U featuring a rapid advance ram for reduced cycle times.

With the pull of the trigger, you can cut ACSR cables up to 477, standard guy wires to 5/8", and ground rods to 5/8". The specially designed flip-top latch and rotating head provide exceptional ease of use and maneuverability in tight working quarters. The REC-S524H has an overload bypass, which will "kick out" when tool reaches 8 tons or is attempting to cut materials beyond its capacities.

NOTE: DO NOT CUT CASE HARDENED STEEL RODS. SEE REC-S524CC, S-24CC, SP-24CC, S-32CC OR SP-32CC1.

For additional ordering information, please refer to page 10.

Specifications	
Output	8 Ton
Weight	10 lbs. with Battery
Size	12.5"L x 12"H x 2.5"W
Jaw Opening	.95"

Cutting Estimates	
	BP-80
336 ACSR	90
1/2" Wire Rope	90
1/2" Rebar	60
1/2" Ground Rod	60
Guy Wire	40

Cutting Capacities	
Wire Rope	7/8"
Rebar (Sc 40)	5/8"
Rebar (Sc 60)	1/2"
Ground Rod	5/8"
ACSR	477 MCM
Guy Wire	5/8"
Guy Wire (EHS)	7/16"

Features

- Flip-Top Latching Head
- Tested Up to 75kV
- One Hand Operation
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Overload Bypass Protection
- 5 Year Warranty on Tool, Battery & Charger

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to "bypass" feature.

24-08
REC-S524H Replacement Blade

REC-S524CC ROBO*CUT™

8 Ton Cutting Tool with .95" Jaw Opening

Specifications	
Output	8 Ton
Weight	10 lbs. with Battery
Size	12.5"L x 12"H x 2.5"W
Jaw Opening	.95"

Cutting Estimates	
	BP-80
477 ACSR	90
1/2" Rebar	60
1/2" Ground Rod	60
3/8" Guy Wire	40

Cutting Capacities	
ACSR	477 MCM
Standard Guy Wire	5/8"
EHS Guy Wire	9/16"
Ground Rod	5/8"
Rebar (Sc 40)	5/8"

Features

- Flip-Top Latching Head
- Tested Up to 75kV
- One Hand Operation
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Overload Bypass Protection
- 5 Year Warranty on Tool, Battery & Charger

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to "bypass" feature.

24C-08
REC-S524CC Replacement Blade

The **REC-S524CC** was designed to cut the toughest steel used in construction today. It can replace an entire tool kit, including several sizes of conventional bolt cutters, hacksaw, acetylene torches and cable cutters. The REC-S524CC was designed from the same hydraulic system as the REC-558U featuring a rapid advance ram for reduced cycle times.

The specially designed anvil style blades were made to cut EHS up to 9/16" and with the pull of the trigger, you can cut ACSR cables up to 477 MCM, standard guy wires to 5/8", and ground rods to 5/8". The specially designed flip-top latch and rotating head provide exceptional ease of use and maneuverability in tight working quarters. The REC-S524CC has an overload bypass, which will "kick out" when tool reaches 8 tons or is attempting to cut cables beyond its capacities.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-S540 ROBO*CUT™

8 Ton Cutting Tool with .6" Jaw Opening

Specifications	
Output	8 Ton
Weight	14.6 lbs. with Battery
Size	17.5"L x 12.5"H x 2.5"W
Jaw Opening	1.6"

Cutting Estimates	
	BP-80
795 ACSR	60
3/4" Wire Rope	90
5/8" Rebar	60
5/8" Ground Rod	60
3/8" Guy Wire	40

Cutting Capacities	
Wire Rope	3/4"
Rebar (Sc 40)	5/8"
Rebar (Sc 60)	5/8"
Ground Rod	5/8"
ACSR	1590 MCM
Guy Wire	5/8"
Cu/Al Cable	1.5"

Features

- Tested Up to 75kV
- One Hand Operation
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Ergonomic Pistol Grip Handle
- Weather Resistant Housing
- Overload Bypass Protection
- 5 Year Warranty on Tool, Battery & Charger

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to "bypass" feature.

The **REC-S540** is designed to cut up to 1590 ACSR and regular guy wires and ground rod up to 5/8". The REC-S540 is ideal for aerial bucket work and trench operations. It features a two stage, rapid advance ram for reduced cycle times.

This cutter is made for one-handed operation. Simply remove the pin latch, place over cable, reinsert pin, and cut. A built-in bypass will pop off if the material is beyond the cutter's capacity. It is not recommended to cut hardened steel.

NOTE: DO NOT CUT EHS GUY WIRE OR CASE HARDENED STEEL RODS. SEE REC-S524CC, S-24CC, SP-24CC, S-32CC OR SP-32CC1.

For additional ordering information, please refer to page 10.

40-14
REC-S540 Replacement Blade

REC-S3550 ROBO*CUT™

13 Ton Cutting Tool with 2" Jaw Opening

Specifications	
Output	13 Ton
Weight	23 lbs. with Battery
Size	21.5"L x 10.5"H x 3.5"W
Jaw Opening	2"

Cutting Estimates	BP-80
Wire Rope	60
Rebar, Ground & Anchor Rod	45
Cu & Al wire	35
ACSR	45
Standard Guy Wire	30

Cutting Capacities	
Wire Rope	1"
Soft Steel Bolts	1-1/4"
Rebar, Ground & Anchor Rod	3/4"
Cu & Al wire	2"
ACSR	2"
Standard Guy Wire	3/4"
Telephone & Lead Sheathed Cable	DO NOT CUT

Features

- Tested Up to 75kV
- Rotational Head
- Rapid Advance
- Ergonomically Balanced
- Weather Resistant Housing
- Overload Bypass Protection
- Most Powerful Battery Operated Cutter
- 5 Year Warranty on Tool, Battery & Charger

Due to material composition, the ratings are to be used as a guide. Actual capacity may vary due to "bypass" feature.

55A-10
REC-S3550 Replacement Blade

The **REC-S3550** cuts ACSR, guy wire, wire rope, and ground rod. Powerful and portable with a 2" jaw opening. A latch-type jaw swings open to accept material to be cut. The head can be rotated for proper positioning of rod or cable. This is our most versatile cutter patterned after our S-55 hand operated cutter.

NOTE: WILL CUT ALL 795 ACSR CABLE, INCLUDING DRAKE.

For additional ordering information, please refer to page 10.

Phone: 800-860-6170
Fax: 800-345-3767

REC-P1 ROBO*PUMP

10,000 psi Battery Powered 28.8 Volt Pump

Specifications	
Output	10,000 psi
Weight	23 lbs. with 2 Batteries
Size	16"L x 6"H x 10"D

Crimping Estimates	
	2 BP-80s
Using a 10 ft. Hose and EP-60W on 1272 ACSR	12
No Load Cycle Time	Advance 25 Sec., Retract 30 Sec.

Optional Accessories	
FS-14	Foot Switch, p. 88
URH-14	Remote Handle, p. 88
REC-P1CASE	Steel Carrying Case, p. 94

Features

- Powerful 28.8 Volt
- Operate Up to Single Acting 60 Ton Press
- Adjustable 10,000 psi
- Eliminates the Need for AC Power
- Compact and Portable
- 5 Year Warranty on Tool, Battery & Charger

The Huskie **REC-P1** is a 28.8 volt, battery operated hydraulic pump that runs on two 14.4 Volt BP-80 batteries. The REC-P1 is supplied with a push button remote control that allows the operator to advance, hold, and retract when needed. The user is never committed to a full cycle and can always back off at any time during the advance – even when the pump is under pressure. High pressure, non-conductive hose can be attached to a 360° moveable swivel port on the pump. This swivel port allows the user to position the hose to fit in confined aerial buckets and manholes.

Both batteries must be inserted in the pump to operate. It is recommended to operate the pump with a 10 foot hose, up to a maximum of 20 feet. A longer hose will cause cycle times to increase.

We recommend you specify the Huskie SC-Series flush face dripless couplers, as not to deplete the oil in the reservoir when changing heads.

For additional ordering information, please refer to page 10.

BP-80

Huskie Tools Lithium-Ion Battery

Features

- High Capacity 3.0Ah Battery Pack
- 50% Longer Run Time as Compared to NiCad
- No Memory Effect
- Lightweight Battery Pack
- Impact Resistant Housing
- The Performance is Minimally Affected by Extreme Temperatures
- Minimal Self-Discharge
- Non-Hazardous Chemistry and Environmentally Safe
- Recyclable with the RBRC Recycling Program
- 5 Year Warranty

See Charger, CH-90 on next page with cord options

The **BP-80** is now the battery of choice for all of your Huskie Tools products. Sticking to our motto, "All for one, one for all", the BP-80 works all of our battery operated tools, past and present. There is a 50% longer run time as compared to the NiCad battery.

For additional ordering information, please refer to page 10.

CH-90
Tri-Chemistry Charger

The **CH-90** is a Tri-Chemistry charger able to charge the BP-80 and all previous Huskie Tool Batteries. During its 1 hour charge time, the CH-90 monitors battery temperature and battery voltage for correct charging.

The design of the charger allows for stability while in motion and includes a reconditioning button for Ni-Cd and Ni-MH memory effect.

For additional ordering information, please refer to page 10.

Features

- 110V AC Power Cord
- Tri-Chemistry Charger Able to Charge All Huskie Tools Batteries
- Reconditioning Feature to Accommodate Ni-Cd and Ni-MH Memory Effect
- Maintenance Trickle Charge for Ni-Cd and Ni-MH Batteries
- UL/CUL Agency Approvals
- Monitors Battery Temperature and Battery Voltage for Correct Charging
- 5 Year Warranty
- 1 Hour Charge Time

Order Data	
CH-90	AC Charger
CH-90DC	DC Charger
CH-ACC	AC Charger Cord
CH-DCC	DC Charger Cord
CH-90BASE	Charger Base Only

CH-DCC
DC Charger Cord

CH-ACC
AC Charger Cord

Tools as rugged and Reliable
as the linemen who use them.

Hydraulic Compression Tools

Hydraulic Compression Tools

Huskie Tools Ambassador
Neal Walker, Distribution Line Technician
Company: Duke Energy
Shelby, North Carolina

Neal holds the EP-510C.

Hydraulic Compression
Pgs. 53-55

Remote Compression Heads
Pgs. 56-60

EP-60W
P. 61

EP-60D
P. 62

EP-100WC
P. 63

Compression Dies
Pgs. 64-69

Die Cases
P. 69

Gauges
P. 70

Phone: 800-860-6170
Fax: 800-345-3767

CN-258

6 Ton Compression Tool with Rubber Boot – .95" Jaw Opening

Accepts "W", "O" and "X" Type Dies

• *See Page 64 for Available Huskie Dies*

Specifications	
Output	6 Ton
Weight	8.5 lbs.
Length	21"
Jaw Opening	.95"

Connector Range	
Lugs	#6-500 MCM Cu
Splices	#6-300 MCM Al
H-Taps	4/0-4/0

Optional Accessory	
HT58CUT	Cutter Die, p. 64

Huskie's **CN-258** is used for service entrance connections up to 4/0, and its bypass cartridge assures all compressions. A two-stage, rapid advance pumping system and threaded collar save compression strokes and time.

The nest dies are D-3, and can be changed with other Kearney "O" type dies. If you wish to use Burndy "W" type dies, simply slip the "W" type over the D-3 nest die and snap them into the locked position. Huskie Tools carries a wide range of market equivalent dies. Pressure can be checked with Huskie's PG-15 pressure gauge. The tool comes complete with a carrying case.

Features

- Two-Stage Rapid Advance
- External Pressure Adjustment

EP-630A

6.2 Ton Dieless Crimping Tool – .9" Jaw Opening

Specifications	
Output	6.2 Ton
Weight	11.5 lbs.
Length	22"
Jaw Opening	.9"
Center Opening	1.25"

Connector Range	
	#10 AWG-500 MCM

Features

- Two-Stage Rapid Advance
- External Pressure Adjustment

The **EP-630A** is commonly used by electric utilities and contractors who prefer dieless compression to circumferential compression.

The operator simply positions a connector in the jaws and pumps until the tool bypasses at 6.2 tons of output. Three moveable nibs crimp the connector against a fourth stationary nib. A carrying case is included.

NOTE: The EP-630A was designed to crimp Anderson style connectors, and other brand connectors manufactured to ANSI C119.4.

EP-750A

6.2 Ton Flip-Top Dieless Crimping Tool – with 1.5" Jaw Opening

Specifications	
Output	6.2 Ton
Weight	11.5 lbs.
Length	23"
Jaw Opening	1.5"
Connector Range	
	#10 AWG-750 MCM

Features

- Designed to Crimp Anderson Connectors & Other Brand Mfg. to ANSI C119.4
- Rapid Advance
- Flip-Top Head Design
- Eliminates the Need for Dies

The **EP-750A** operates the same as the EP-630A, but has a larger connector/cable capacity. Larger cables can be inserted and easily removed by opening the flip-top head. A carrying case is included.

NOTE: The EP-750A was designed to crimp Anderson style connectors, and other brand connectors manufactured to ANSI c119.4.

EP-410

12 Ton Compression Tool with Rubber Boot – 1" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	13 lbs.
Length	23"
Jaw Opening	1"
Connector Range	
Lugs	#8-750 MCM Cu
Splices	#10-400 MCM Cu

Features

- Protective Rubber Boot on "C" Head
- External Pressure Adjustment

The **EP-410**, hand operated, compression tool features a two stage rapid advance pumping system. It accepts all U-type dies currently manufactured for 12 ton tools on the market.

Consult your connector manufacturer for exact cable, connector, and die combinations. Huskie stocks a variety of dies, simply specify the manufacturer's die and connector numbers when contacting your dealers. A carrying case is included.

Phone: 800-860-6170
Fax: 800-345-3767

EP-430

12 Ton Compression Tool with Rubber Boot – 1-3/16" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	13.5 lbs.
Length	24"
Jaw Opening	1-3/16"

Connector Range	
Lugs	Up to 750 MCM Cu
Splices	Up to 600 MCM Cu

The **EP-430** is unique in that it has a large jaw opening of 1-3/16" and is able to splice up to 600 MCM. This tool was designed for the electrical contractor or electric utility lineman who is confronted with larger cable diameters and larger connectors. Similar competitive tools are limited to a .95" jaw opening that drastically reduces their connecting range. Most internal hydraulic components are the same as the EP-410 and EP-510. A carrying case is included.

Features

- Protective Rubber Boot on "C" Head
- External Pressure Adjustment

EP-510C

12 Ton Compression Tool with Rubber Boot – 1.65" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	16.5 lbs.
Length	25"
Jaw Opening	1.65"

Connector Range	
Lugs and Splices	Up to 750 MCM Al and Cu

Huskie's **EP-510C** was engineered to accommodate all U-type dies currently used in existing 12 ton tools. It is one of Huskie's most versatile tools since it takes a full range of connectors and lugs to 750 MCM. The jaw opening is 1.65" to accept larger splices up to 750 MCM. A carrying case is included. The EP-510C output tonnage is adjustable to 14 tons for some specific grounding applications.

Features

- Protective Rubber Boot on "C" Head
- External Pressure Adjustment
- UL Classified

EP-510K

12 Ton Compression Tool with Rubber Boot – 1.5" Jaw Opening

Accepts "WH-2"and "WH-3" Type Dies
• *See Page 66 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	17 lbs.
Length	26"
Jaw Opening	1.5"
Connector Range	
Lugs	Up to 1033 MCM Strand
Splices	477 ACSR
Order Data	
EP-510K	Compression Tool
PG-4K	Test Gauge with TDK Dies
Optional Accessory	
UDK-1	"U" Die Adapter, p. 92

Features

- Protective Rubber Boot on "C" Head
- External Pressure Adjustment

The Huskie **EP-510K** was designed to accept Kearney dies commonly used in their models WH-2, PH-2, and WH-3 hydraulic tools. It features our exclusive replaceable bypass cartridge to facilitate shop repairs and eliminate costly down time. A carrying case is included.

NOTE: Tool output tonnage can be determined by using our model PG-4 pressure gauge with model TDK-1.

UDK-1

CN-58H

6 Ton Remote Compression C-Head with Rubber Boot – .95" Jaw Opening

Accepts "W", "O" and "X" Type Dies
• *See Page 64 for Available Huskie Dies*

Specifications	
Output	6 Ton
Weight	6 lbs.
Length	12"
Jaw Opening	.95"
Connector Range	
Lugs	#6-500 MCM Cu
Splices	#6-4/0 Al
H-Taps	4/0-4/0 Al

Features

- 3/8" Male Screw Type Coupler Provided
- Protective Rubber Boot on "C" Head

The **CN-58H** remote operated "C" head requires an external pumping source of 10,000 psi. It accepts Kearney "O" type and Burndy "W" type dies. It is a service entrance compression tool and the smallest of our compression tool line. The head is lightweight for easy handling in hot stick applications.

The tool is supplied with a 3/8" male screw type coupler and a carrying case.

NOTE: When using any of these high-pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

Phone: 800-860-6170
Fax: 800-345-3767

EP-630HA

6.2 Ton Dieless Remote Crimping Head with Rubber Boot – .9" Jaw Opening

Specifications	
Output	6.2 Ton
Weight	6.5 lbs.
Length	10" with Coupler
Jaw Opening	.9"
Width	4.5"
Center Opening	1.25"
*Connector Range	
	#10 AWG-500 MCM Cu/Al

Features

- *Designed to Crimp Anderson Connectors & Other Brand Mfg. to ANSI C119.4
- Eliminates the Need for Dies
- Protective Rubber Boot on "C" Head

The **EP-630HA** is a dieless remote head that requires an external 10,000 psi pumping source. It is designed to crimp Anderson connectors #10 str - 500 MCM bare Al and #10 sol - 500 MCM bare Cu. The EP-630HA is mostly used by electrical contractors who prefer dieless compression to circumferential compression.

This tool is supplied with a 3/8" male, screw type coupler and carrying case.

NOTE: The EP-630HA was designed to crimp Anderson style connectors, and other brand connectors manufactured to ANSI C119.4.

EP-750HA

6.2 Ton Flip-Top Dieless Remote Crimping Head – 1.5" Jaw Opening

Specifications	
Output	6.2 Ton
Weight	6.5 lbs.
Length	10.5" with Coupler
Width	5.5"
Jaw Opening	1.5"
*Connector Range	
	#10 AWG-750 MCM Cu/Al

Features

- *Designed to Crimp Anderson Connectors & Other Brand Mfg. to ANSI C119.4
- Flip-Top Head Design
- Eliminates the Need for Dies

The Huskie **EP-750HA** dieless, Anderson style head has a flip-top opening and a pull-pin locking mechanism to accept larger connectors up to 750 MCM. Output force is 6.2 tons, and 10,000 psi external pumping source is required. The EP-750HA is supplied with a 3/8" male, screw type coupler and a carrying case.

NOTE: THE EP-750HA was designed to crimp Anderson style connectors, and other brand connectors manufactured to ANSI C119.4.

EP-410H

12 Ton Remote Compression C-Head with Rubber Boot – 1" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	8-1/4 lbs.
Length	10"
Jaw Opening	1"

Connector Range	
Lugs	#8-750 MCM Cu
Splices	#10-400 MCM Cu

Feature

- Protective Rubber Boot on "C" Head

The **EP-410H** is a traditional C-head with a one-inch jaw opening. It will accept all "U" type dies currently used in 12 ton tools on today's market.

A 10,000 psi external pump is required to operate the C-head. The output pressure is 12 tons when the pump is set at 10,000 psi. After a compression is made on a lug or sleeve, an internal ram spring retracts the jaw when the pump pressure is relieved. The tool is supplied with a standard 3/8" male, screw type coupler but can be fitted with an opposite female coupler if requested. Carrying case included.

NOTE: When using any of these high-pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

EP-410HT

12 Ton Remote Titanium Compression C-Head – 1" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	5 lbs.
Length	10"
Jaw Opening	1"

Connector Range	
Lugs	#8-750 MCM Cu
Splices	#10-400 MCM Cu

Optional Accessories	
HTADPT	Hot Stick Adapter

Features

- Extremely Lightweight Titanium
- Ideal for Hot Stick Applications
- All the Same Features as the EP-410H Model

The unique, lightweight titanium head of the **EP-410HT** reduces its weight to just five pounds. This is an ideal weight for Hot Stick handling since it is easy to lift and effortless to control while making connections. Though more expensive than conventional 12 ton tools, operator preference and performance when handling this tool will save time and investment over the life of the product. The tool is supplied with a standard 3/8" male, screw type coupler but can be fitted with an opposite female coupler if requested. A carrying case is included.

NOTE: When using any of these high-pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

EP-430H

12 Ton Remote Compression C-Head with Rubber Boot – 1-3/16" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	10 lbs.
Length	11"
Jaw Opening	1-3/16"

Connector Range	
Lugs	Up to 750 MCM Cu
Splices	Up to 600 MCM Cu

Feature

- Protective Rubber Boot on "C" Head

The **EP-430H** is a remote C-head that requires an external 10,000 psi pumping source for operation. This unit has a larger jaw opening than our EP-410H. The 1-3/16" opening allows the user to compress larger splices up to 600 MCM. The EP-430H is a single-acting, spring return tool. Its trim design allows for easy handling in field applications. This unit is supplied with a 3/8" male, screw type coupler, metal carrying case and die tray. We recommend the use of our non-conductive, high pressure hose.

The EP-430H accepts "U" type dies designed to fit all 12 ton tools. Unique features include a knurled handle shank, a pull die release button on top of the C-head, and a push button die release on the opposite jaw.

EP-510HC

12 Ton Remote Compression C-Head with Rubber Boot – 1.65" Jaw Opening

Accepts "U" Type Dies
• *See Page 65 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	11 lbs.
Length	12-1/4"
Jaw Opening	1.65"

Connector Range	
Lugs	750 MCM Cu
Splices	750 MCM Cu

Feature

- Protective Rubber Boot on "C" Head

The **EP-510HC** is a remote C-head that requires an external 10,000 psi pumping source. It accepts all "U" type dies used with conventional 12 ton compression tools. The larger jaw opening of 1.65" accepts conductors and mid-span sleeve connections up to 750 MCM. The EP-510HC is supplied with a screw type, 3/8" male coupler, metal carrying case, and die tray. We recommend the use of our non-conductive high pressure hose.

NOTE: When using any of these high-pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

EP-510HK

12 Ton Remote Compression C-Head with Rubber Boot – 1.5" Jaw Opening

Accepts "WH-2"and "WH-3" Type Dies
• *See Page 66 for Available Huskie Dies*

Specifications	
Output	12 Ton
Weight	13.5 lbs.
Length	14"
Jaw Opening	1.5"

Connector Range	
Lugs	Up to 1033 MCM Stranded
Splices	477 ACSR

Feature

- Protective Rubber Boot on "C" Head

Optional Accessory	
UDK-1	"U" Die Adapter, p. 93

UDK-1

The **EP-510HK** is a Kearney style tool which accepts PH-2, WH-2, and WH-3 style dies.

It has 12 tons of output and is used for crimping up to 750 MCM lugs or splices. An external 10,000 psi pumping source is needed to develop 12 tons of compression force. The EP-510HK comes complete with a 3/8" male, screw type coupler and carrying case.

NOTE: When using any of these high-pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

EP-610H

15 Ton Remote Compression C-Head – 2" Jaw Opening

Accepts "P" Type Dies
• *See Page 66 for Available Huskie Dies*

Specifications	
Output	15 Ton
Weight	14.5 lbs.
Length	14.5"
Jaw Opening	2" (1.5" with "U" Die Adapter)

Connector Range	
Aluminum	#8 AWG-1250 MCM
Copper	$8 AWG-1500 MCM

Feature

- Also Available for T&B Style 15 Ton Dies (Model EP-610TB)

Optional Accessories	
PU-15	"U" Die Adapter, p. 93

PU-15

The **EP-610H** is a remote C-head that requires an external 10,000 psi pumping source. It accepts all Huskie HT61 series and Burndy "P" type dies used in the Y-46. When used with a Huskie PU-15 die adapter it will accept all "U" type dies used with any 12 ton tool. This tool is primarily used for cables above 750 MCM or in cases where additional tonnage is required to compress larger lugs, terminals and sleeves on tension connections. It is most always used on larger underground cables up to 1000 MCM. The EP-610H is supplied with a 3/8" male, screw type coupler and carrying case.

NOTE: When using any of these high-pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

Phone: 800-860-6170
Fax: 800-345-3767

EP-60W (Steel), EP-60WT (Titanium)

60 Ton Compression Head

Accepts "HA60-SERIES" Type Dies

• *See Page 67 for Available Huskie Dies*

Specifications	
Output	60 Ton
Weight	45 lbs. (Steel) 33 lbs. (Titanium)
Size	6"W x 17"H
Cable Capacity	2.4" O.D.
Die Style	HA60-Series
Ram Stroke	1.5" Travel
Oil Volume	312 cc

Connector Range	
Lugs	Up to 2000 MCM Cu/Al
Splices	Up to 2500 MCM Cu/Al

Order Data	
EP-60W	60 Ton Single Acting Compression Head
EP-60WT	Titanium Model

Features

- Designed for ACSR & ACAR Transmission and Distribution Cable
- Lightest 60 Ton Presses in the Industry
- Ultra Light Titanium Model Available
- Extremely Portable

The **EP-60W** is a single acting, 60 ton press that is designed to compress sleeves and lugs on ACSR and ACAR transmission and distribution cables. They are also ideal for substation construction and are operable from any 10,000 psi pumping source with proper oil capacity. These tools are made to be portable for easy maneuverability, unlike other brands.

The EP-60W series will readily accept any shell type dies currently used with Alcoa or Burndy 60 ton presses. Dies not listed can be made to specification; consult Huskie for more information.

Huskie also offers the lightest 60 ton presses in the industry. The EP-60W series is also offered in titanium. Titanium has the strength of steel but weighs nearly 30 percent less. Due to its lighter weight and the tool's portable design, the chance of back and muscle strain is greatly reduced. The titanium 60 ton press is easily maneuvered where heavy steel presses are almost impossible to operate, making it an ideal tool for jobs such as helicopter line installations.

NOTE: When using any of these high-pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

EP-60D (Steel), EP-60DT (Titanium)

60 Ton Double Acting Compression Head

Accepts "HA60-SERIES" Type Dies

• *See Page 67 for Available Huskie Dies*

Specifications	
Output	60 Ton
Weight	47 lbs. (Steel) 34 lbs. (Titanium)
Size	6"W x 17"H
Cable Capacity	2.4" O.D.
Die style	HA60-Series
Ram Stroke	1.5" Travel
Oil Volume	303 cc

Connector Range	
Lugs	Up to 2000 MCM Cu/Al
Splices	Up to 2500 MCM Cu/Al

Order Data	
EP-60D	60 Ton Double Acting Compression Head
EP-60DT	Titanium Model

Features

- Designed for ACSR & ACAR Transmission and Distribution Cable
- Double Acting Hydraulic Cylinder for Quicker Return Times
- Ultra Light Titanium Model Available
- Extremely Portable

EP-60DT

The **EP-60D** series is a double acting model. Double acting tools will eliminate the possibility of the tool jamming. Double acting means hydraulically advancing the ram to build the proper tonnage, then the hydraulic pressure is reversed to retract the ram. This will ensure the ram to retract without having to pry the jaws apart to release them and it will also retract much faster than single acting spring release tools.

Titanium has the strength of steel but weighs nearly 30% less. Due to its lighter weight and the tool's portable design, the chance of back and muscle strain is greatly reduced. The titanium 60 ton press is easily maneuvered where heavy steel presses are almost impossible to operate making it an ideal tool for jobs such as helicopter line installations.

NOTE: When using any of these high-pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

EP-100WC and EP-200WA

100 and 200 Ton Compression Head

EP-100WC Accepts "HA100-SERIES" Type Dies

• *See Page 67 for Available Huskie Dies*

Specifications EP-100WC	
Output	100 Ton
Weight	96 lbs.
Size	7-1/2"W x 14"H
Die Style	HA100-Series
Ram Stroke	.98" Travel
Oil Volume	314 cc

Specifications EP-200WA	
Output	200 Ton
Weight	190 lbs.
Size	14"W x 17"H
Die Style	HA200-Series
Ram Stroke	1.57" Travel
Oil Volume	1134 cc

Features

- Designed for Full Tension Transmission and Substation Connections
- Double Acting Hydraulic Cylinder for Quicker Return Times
- Lightest Weight Models in Their Class
- Removable Die Caps for Easy Cable Insertion

The **EP-100WC** and **EP-200WA** are 100 and 200 ton compression heads for full tension, transmission and substation connections and require an external 10,000 psi pumping source.

The EP-100WB will accept shell type dies currently used with Alcoa 100 ton compression heads. Dies for 200 ton presses are considered special application and must be engineered to the connector manufacturers specifications. Consult factory for these dies. Both compression heads are double acting and designed to operate from Huskie Tools pump models R14EAD, HPG-4 or any 3/4 HP high-pressure, double acting pump with the proper oil capacity.

Double acting means hydraulically advancing the ram to build proper tonnage, then the hydraulic pressure is reversed to retract the ram. This will eliminate all possibilities of the connector hanging up or the tool jamming. The EP-200WA is the only 200 ton press on the market today and both are the lightest weight models in their class. Both models have removable die caps for easy connector positioning and 3/8" screw-type couplers.

NOTE: When using any of these high-pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

HT58-SERIES

Equivalent to Burndy "W" Type Dies for 4-6 Ton Tools

Features

- Fits All Existing Tools Accepting "W" Type Dies
- Marked with Huskie and Equivalent Burndy "W" Die Number
- Nickel Plated

HUSKIE	BURNDY Equivalent	HUSKIE	BURNDY Equivalent
HT58AE	W-K840	HT58DE	W-236
HT58BX	W-161	HT58DG	W-238
HT58BZ	W-162	HT58DH	W-239
HT58CB	W-163	HT58DK	W-241
HT58CD	W-164	HT58DM	W-243
HT58CE	W-165	HT58DP	W-245
HT58CF	W-166	HT58DT	W-247
HT58CG	W-167	HT58DV	W-248
HT58CM	W-171	HT58DW	W-249
HT58G	W-BG	HT58DY	W-251
HT58J	W-C	HT58KA	W-687
HT58AK	W-O	HT58KH	W-702
HT58CUT	CUTTER	HT58AF	W-L
		HT58K	WKK

HUSKIE	BURNDY Equivalent
HT58AW	W-2CRT
HT58AU	W-4CRT
HT58AT	W-5CRT
HT58AY	W-25RT
HT58AZ	W-26RT
HT58BA	W-27RT
HT58BC	W-28RT
HT58BE	W-29RT
HT58BF	W-30RT
HT58BJ	W-31RT
HT58BK	W-32RT
HT58BL	W-34RT

Huskie 6 Ton Die	Burndy 6 Ton Die	Nicopress
HT58BX	W-161	J
HT58BZ	W-162	M & P
HT58CB	W-163	T
HT58CM	W-171	X

HUSKIE	CSA Equivalent
HT58PA	CSA-20
HT58PB	CSA-22
HT58PC	CSA-24

HT-SERIES

Equivalent to Kearney "O" Type Dies for 4-6 Ton Tools

Features

- Fits All Existing Tools Accepting "O" Type Dies
- Stamped with Kearney Die Size
- Nickel Plated

HUSKIE	KEARNEY Equivalent	HUSKIE	KEARNEY Equivalent
HT-B	B	HT-510	510 (HEX)
HT-D	D	HT-635	635 (HEX)
HT-D3	D3	HT-747	747 (HEX)
HT-J	J	HT-316	3/16
HT-K	K	HT-14	1/4
HT-O	O	HT-516	5/16
HT-P	P	HT-38	3/8
HT-T	T	HT-12	1/2
HT-737	737	HT-916	9/16
HT-781	781	HT-1932	19/32
HT-840	840	HT-58-1	5/8-1
HT-845	845	HT-1116	11/16

HUSKIE	CSA Equivalent
HTCSA-20	CSA-20
HTCSA-22	CSA-22
HTCSA-24	CSA-24



Phone: 800-860-6170
Fax: 800-345-3767

HT41-SERIES

Equivalent to Burndy and Kearney "U" Type Dies for 12 Ton Tools

Features

- Fits All Existing Tools Accepting "U" Style Dies
- Marked with Huskie and Equivalent Burndy "U" Die Number, or Alcoa "B" Die Number, or Kearney Die Size
- Die Nest Engraved with Huskie Die Number Suffix

HUSKIE	ALCOA Equivalent	HUSKIE	ALCOA Equivalent
HT4107	74SH-03SH	HT4131	72AH
HT4108	75SH-05SH	HT4132	73AH-08AH
HT4109	76SH	HT4140	07CD
HT4111	11AH	HT4141	08CD
HT4120	20AH-14AH	HT4142	09CD
HT4128	74AH-10AH	HT4155	72SH-01SH
HT4129	75AH-12AH	HT4156	73SH
HT4130	76AH	HT4180	13AH-80EA

HUSKIE	CSA Equivalent	HUSKIE	CSA Equivalent
HT41PA	CSA-20	HT41PH	CSA-24CU
HT41PB	CSA-22	HT41PI	CSA-24CU
HT41PC	CSA-24	HT41PJ	CSA-28CU
HT41PD	CSA-26	HT41PK	CSA-30WCU
HT41PE	CSA-28	HT41PM	CSA-1
HT41PF	CSA-30W	HT41PN	CSA-2
HT41PL	CSA-20CU		
HT41PG	CSA-22CU		

HUSKIE	BURNDY Equivalent	HUSKIE	BURNDY Equivalent	HUSKIE	BURNDY Equivalent	HUSKIE	KEARNEY Equivalent
HT41G	U-BG	HT41DG	U-238	HT41AT	U5CRT	HT41KA	1/4
HT41J	U-C	HT41DH	U-239	HT41AY	U25RT	HT41KB	3/8
HT41V	U-D	HT41DL	U-242	HT41AZ	U26RT	HT41KC	5/16
HT41X	U-D3	HT41DM	U-243	HT41BA	U27RT	HT41KD	1/2
HT41Y	U-E	HT41DP	U-245	HT41BC	U28RT	HT41KE	9/16
HT41Z	U-F	HT41DT	U-247	HT41BE	U29RT	HT41KF	19/32
HT41AB	U-H	HT41DV	U-248	HT41GF	U2CABT	HT41KG	5/8-1
HT41AF	U-L	HT41DW	U-249	HT41GM	U4CABT	HT41KH	11/16
HT41AG	U-M	HT41DY	U-251	HT41GE	U6CABT	HT41KI	3/4
HT41AJ	U-N	HT41DZ	U-252	HT41GL	U8CABT	HT41KK	29/32
HT41AK	U-O	HT41EK	U-261	HT41BF	U30RT	HT41KL	15/16
HT41AM	U-R	HT41FG	U-305	HT41BJ	U31RT	HT41KM	1-2
HT41BX	U-161	HT41FM	U-316	HT41BK	U32RT	HT41KN	1-1/8-2
HT41BZ	U-162	HT41FN	U-317	HT41BL	U34RT	HT41KO	1-1/2-2
HT41CB	U-163	HT41FU	U-321	HT41BM	U36RT	HT41KP	510
HT41CD	U-164	HT41FX	U-327	HT41BP	U39RT	HT41KQ	572
HT41CE	U-165	HT41GK	U-373	HT41EX	U25ART	HT41KR	635
HT41CF	U-166	HT41GX	U-468	HT41EY	U26ART	HT41KS	737
HT41CG	U-167	HT41HM	U-490	HT41GW	U27ART	HT41KT	747
HT41CJ	U-168	HT41JM	U-654	HT41EZ	U28ART	HT41KU	781
HT41CK	U-169	HT41JN	U-655	HT41FW	U29ART	HT41KV	BKT
HT41CL	U-170	HT41JP	U-658	HT41GZ	U30ART	HT41AE	840
HT41CT	U-203	HT41JR	U-659	HT41FA	U31ART	HT41U	U
HT41DE	U-236	HT41KJ	U-705	HT41HH	U32ART	HT41KX	727
HT41DF	U-237	HT41LG	U-788	HT41FB	U34ART		
		HT41NC	U-997	HT41HG	U36ART		
		HT41AE	U-K840	HT41LJ	U39ART2		
		HT41AX	U1CRT	HT41CUT	Cutter Dies		
		HT41AW	U2CRT	HT41TEST	Test Dies		
		HT41AV	U3CRT				
		HT41AU	U4CRT				

HTK-SERIES

Equivalent to Kearney "WH-2" (10.7 Ton) & "WH-3" (12 Ton) Type Dies

Features

- Fits All Existing Tools Accepting "O" Type Dies
- Stamped with Kearney Die Size
- Nickel Plated

HUSKIE	KEARNEY Equivalent	HUSKIE	KEARNEY Equivalent	HUSKIE	KEARNEY Equivalent	HUSKIE	KEARNEY Equivalent
HTK	BKT	HTK-510	510	HTK-14	1/4	HTK-34H	3/4 (HEX)
HTK-C	C	HTK-572	572	HTK-516	5/16	HTK-2932H	29/32 (HEX)
HTK-D	D	HTK-635	635	HTK-38	3/8	HTK-1516	15/16
HTK-N	N	HTK-727	727	HTK-12	1/2	HTK-1-2H	1-2 (HEX)
HTK-N-2	N (WH-3 Only)	HTK-737	737	HTK-916	9/16	HTK-1-18-2H	1-1/8
HTK-O	O	HTK-747	747	HTK-1932	19/32	HTK-1-516H	1-5/16 (HEX)
HTK-P	P	HTK-781	781	HTK-58-1	5/8-1	HTK-1-12H	1-1/2 (HEX)
HTK-U	U	HTK-840	840	HTK-1116	11/16	HTK-1-12H-3	1-1/2 (WH-3 Only)

HT61-SERIES

Equivalent to Burndy "P" Type Dies for 15 Ton Tools

Features

- Fits All Existing Y46 Heads Accepting "P" Type Dies
- Marked with Huskie and Equivalent Burndy "P" Type Dies
- Black Oxide Finish
- Polished Die Nest

HUSKIE	BURNDY Equivalent	HUSKIE	BURNDY Equivalent
HT61BP	P39RT	HT61FC	P39ART
HT61BR	P40RT	HT61HJ	P40ART
HT61BU	P44RT	HT61FD	P44ART
HT61BV	P46RT	HT61AC	PKR
HT61KX	P-724	HT61AJ	PN
PU-15	DIE ADAPTER		

HUSKIE	CSA Equivalent
HT61PF	CSA-30
HT61PK	CSA-30CU
HT61PO	CSA-32
HT61PP	CSA-32CU
HT61PQ	CSA-34
HT61PR	CSA-34CU

Phone: 800-860-6170
Fax: 800-345-3767

HA60-SERIES

Equivalent to Alcoa 60 Ton Dies

Features

- Fits All Existing 60 Ton Presses Accepting 60 Ton Shell Type Dies
- Marked with Huskie and Equivalent Alcoa Catalog Number
- Black Oxide Finish

HUSKIE	ALCOA Equivalent	HUSKIE	ALCOA Equivalent
HA60-01	6010SH	HA60-27	6040AH
HA60-02	6012SH	HA60-28	6074AH
HA60-03	6014SH	HA60-29	6075AH
HA60-04	6016SH	HA60-30	6076AH
HA60-05	6018SH	HA60-40	6007CD
HA60-06	6020SH	HA60-41	6008CD
HA60-07	6074SH	HA60-42	6009CD
HA60-08	6075SH	HA60-43	6010CD
HA60-09	6076SH	HA60-44	6011CD
HA60-20	6020AH	HA60-45	6012CD
HA60-21	6024AH	HA60-46	6013CD
HA60-22	6027AH	HA60-47	6014CD
HA60-23	6030AH	HA60-48	6015CD
HA60-24	6034AH	HA60-49	6016CD
HA60-25	6036AH	HA60-50	6017CD
HA60-26	6038AH		

HA100-SERIES

Equivalent to Alcoa 100 Ton Dies

Features

- Fits All Existing 100 Ton Presses Accepting 100 Ton Shell Type Dies
- Marked with Huskie and Equivalent Alcoa Catalog Number
- Black Oxide Finish

HUSKIE	ALCOA Equivalent	HUSKIE	ALCOA Equivalent	HUSKIE	ALCOA Equivalent
HA100-01	10010SH	HA100-24	10034AH	HA100-41	10010CD
HA100-02	10012SH	HA100-25	10036AH	HA100-42	10009CD
HA100-03	10014SH	HA100-26	10038AH	HA100-43	10010CD
HA100-04	10016SH	HA100-27	10040AH	HA100-44	10011CD
HA100-05	10018SH	HA100-28	10074AH	HA100-45	10012CD
HA100-06	10020SH	HA100-29	10075AH	HA100-46	10013CD
HA100-07	10074SH	HA100-30	10076AH	HA100-47	10014CD
HA100-08	10075SH	HA100-34	10042AH	HA100-48	10015CD
HA100-20	10020AH	HA100-36	10044AH	HA100-49	10016CD
HA100-21	10024AH	HA100-37	10046AH	HA100-50	10017CD
HA100-22	10027AH	HA100-38	10048AH	HA100-51	10018CD
HA100-23	10030AH	HA100-40	10007CD	HA100-52	10019CD
				HA100-53	10020CD

Huskie Tools Die Chart

Huskie Dies are configured to be equivalent to Burndy dies of respective size. When using Huskie HT series dies consult the connector manufacturer for their recommended die cross referencing and application instructions. All Huskie dies are machined or cast from solid steel stock and case hardened to 45-50 HRC and are guaranteed for 10,000 operations. These dies are also marked with HT numbers and Burndy cross reference numbers to make cross referencing easy and less confusing. The following chart lists Huskie and equivalent Burndy numbers for reference only. Other manufacturer die numbers are also listed to aid the user in selecting the proper die cross reference numbers when using a particular connector. All connectors are different and the connector manufacturer should be consulted in each case. Many manufacturers offer different size connectors for the same wire size. Huskie Tools, Inc. is not responsible in the event of misuse or misapplication of die sets. Huskie Tools is not a connector manufacturer, but a tool and die supplier.

FOR REFERENCE ONLY! CONSULT YOUR CONNECTOR MANUFACTURER FOR EXACT CABLE, CONNECTOR AND DIE SELECTION.

Approximate Cu	Conductor Range Al	Die Color Code	Huskie Die Set Catalog Number	Burndy Index	Burndy Die Set Catalog Number	T & B Index
6 AWG	8WG	BLUE	H41AT/HT41GL	7/374	U5CRT/U8CABT	24
4 AWG	6 AWG	GREY	HT41AU/HT41GE	8/346	U4CRT/U6CABT	29
2 AWG		BROWN	HT41AW	10	U2CRT	33
1 AWG	4 AWG	GREEN	HT41AX	11	U1CRT	37
	4 AWG	GREEN	HT41GM	375	U4CABT	37
1/0 AWG	2 AWG	PINK	HT41AY	12	U25RT	42H
	2 AWG	PINK	HT41GF	348	U2CABT	42H
2/0 AWG		BLACK	HT41AZ	13	U26RT	45
3/0 AWG		ORANGE	HT41BA	14	U27RT	50
	1/0 AWG	TAN	HT41EX	296	U25ART	50
4/0 AWG		PURPLE	HT41BC	15	U28RT	54H
	2/0 AWG	OLIVE	HT41EY	297	U26ART	54H
250 MCM		YELLOW	HT41BE	16	U29RT	62
	3/0 AWG	RUBY	HT41GW	467	U27ART	60
300 MCM		WHITE	HT41BF	17	U30RT	66
	4/0 AWG	WHITE	HT41EZ	298	U28ART	66
350 MCM		RED	HT41BJ	18	U31RT	71H
	250 MCM	RED	HT41FW	324	U29ART	71H
400 MCM		BLUE	HT41BK	19	U32RT	76
	300 MCM	BLUE	HT41GZ	470	U30ART	76
500 MCM		BROWN	HT41BL	20	U34RT	87H
	350 MCM	BROWN	HT41FA	299	U3RT	87H
600 MCM	400 MCM	GREEN	HT41HH/HT41BM	472/22	U32ART/U36RT	94H
	500 MCM	PINK	HT41FB	300	U34ART	99H
750 MCM		BLACK	HT41BP	24	U39RT	106H
	600 MCM	BLACK	HT41HG	473	U36ART	106H
	700/750 MCM	YELLOW	HT41LJ	936	U39ART-2	115H

Phone: 800-860-6170
Fax: 800-345-3767

Wire Rope Dies

12 Ton "U" Type Compression Dies

Features

- Designed for Duplex Oval Sleeves and Button Stops
- For use on Copper and Aluminum Only
- Fits in Any 12 Ton Tool that Uses Standard "U" Dies

ITEM #	DESCRIPTION	ALUMINUM	COPPER
18AC	WIRE ROPE DIE 1/8" AC	1/8"	1/8"
316AC	WIRE ROPE DIE 3/16" AC	3/16"	3/16"
14AC	WIRE ROPE DIE 1/4" AC	1/4"	1/4"
516AC	WIRE ROPE DIE 5/16" AC	5/16"	5/16"
38AC	WIRE ROPE DIE 3/8" AC	3/8"	3/8"
716A12C	WIRE ROPE DIE 7/16" A, 1/2" C	7/16"	1/2"
716C	WIRE ROPE DIE 7/16" C		7/16"
12A	WIRE ROPE DIE 1/2" A	1/2"	

HTK-CASE, DIE-CASE & W-CASE

Die Cases

HTK-CASE

DIE-CASE

W-CASE

The **HTK CASE** offers a convenient way to store your Huskie dies. The case is a custom molded case made with a shock absorbing cushion of air between sturdy double walls. It has ten individual compartments that will hold up to ten die sets. Will hold: HTK-Series, HT41 Series, HT58-Series and HT-Series dies.

The Huskie model **DIE-CASE** is offered as a stand alone die carrying case and is the same case supplied with the REC-3000 Series kits. It will hold either 18 "U" type die sets or 8 "P" type die sets. It is constructed of heavyweight plastic with a hinged see-through top for easy identification of die sets.

The **W-CASE** will hold 12 "W" dies from our HT58-Series.

Features of HTK-CASE

- Shock Absorbing Cushion of Air Between Double Walls
- Holds Up To 10 Die Sets

Features of DIE-CASE

- Holds 18 "U" Type Die Sets or 8 "P" Type Die Sets
- Constructed of Heavyweight Plastic

Features of W-CASE

- Holds 12 "W" Type Die Sets
- Constructed of Heavyweight Plastic

Gauges

PG-1

PG-4

PG-15

PG-58

PG-610A

PG-ND

PG-SL

Specifications PG-1	
Description	In Line Pressure Gauge Kit
Weight	3 lbs.
Dial Face	2-1/2"
Size	9" x 4.5" x 1.5"

Specifications PG-4/PG-4K	
Description	12 Ton Test Gauge Kit (PG-4) 12 Ton Test Gauge Kit-Kearney (PG-4K)
Weight	3.5 lbs.
Dial Face	4"
Size	9" x 4" x 1.5"

Specifications PG-15	
Description	6 Ton Test Gauge Kit
Weight	5 lbs.
Dial Face	4"
Size	10.5" x 4" x 2"

Specifications PG-58	
Description	6 Ton test Gauge Kit
Weight	1.78 lbs.
Dial Face	4"
Size	7.5" x 4" x 1.75"

Specifications PG-610A	
Description	15 Ton Test Gauge Kit
Weight	3.3 lbs.
Dial Face	4"
Size	10" x 4" x 1.75"

Specifications PG-ND	
Description	Test Gauge Kit
Weight	3.4 lbs.
Dial Face	4"
Size	9.5" x 4" x 1.5"

Specifications PG-SL	
Description	Test Gauge Kit
Weight	3.4 lbs.
Dial Face	4"
Size	9.5" x 4" x 1.5"

The **PG-1**, in line pressure gauge has standard 3/8" couplers and a 10,000 psi indicator. It is used to test pump output pressure. Male and female couplers allow you to install it between the tool head and the pump.

The **PG-4** gauge is used to calibrate 12 ton output tools. It was designed to fit in all brands of 12 ton tools, and is supplied with U-type test dies. If you are using Kearney tools, specify PG-4K which comes with TDK-1 test dies.

The **PG-15** is designed to check pressure on Huskie 6 ton hydraulic tools (except the ECO-EZ and SL-Series tools. It is supplied with necessary adapter.

The **PG-58** is designed to check internal pressure on all pistol grip style battery operated tools. It is necessary to check pressure on our dieless tools.

The **PG-610A** gauge is used to calibrate 12 & 15 ton output tools. The gauge is supplied with HT41 test die. A "U" die adapter (not supplied) is necessary to test a 15 ton tool.

The **PG-ND** gauge is used to calibrate the ECO-EZ Series tools, as well as the REC-ND tools and the **PG-SL** is for SL-ND tools with pull-pin.

Our PG-4, PG-15, PG-58, & PG-610A gauges come complete with necessary dies, carrying case, and certification.

Phone: 800-860-6170
Fax: 800-345-3767

Hydraulic & Manual Cutting Tools

Hydraulic & Manual Cutting Tools

S-Series Hydraulic Handheld Cutters
P. 75

Ratchet Cable Cutters
P. 73

Low Pressure Cable Cutter
P. 79

SP-Series Hydraulic Handheld Cutter Heads
P. 77

Cable and Insulation Strippers
P. 80

Hydraulic Scissor Remote Heads
P. 78

Phone: 800-860-6170
Fax: 800-345-3767

RI-500
Ratchet Cable Cutter

Specifications	
Weight	1.5 lbs.
Length	10″
Handle Span	5.5″
Cutting Capacities	
1.25″ O.D. Al	
500 MCM Cu	
Optional Accessories	
Z325A-11	Fixed Replacement Blade
Z325A-12	Moveable Replacement Blade

The **RI-500** was designed to cut up to 500 MCM copper cables. The special ergonomic handle design gives you extra leverage at the bottom and is narrowed at the top for easier handling.

The durable handles are made of a high visibility, orange plastic. Its cutting head is black oxide coated to help reduce corrosion.

NOTE: DO NOT CUT STEEL.

Features

- Longer Handles for Leverage
- Thumb Lever to Release the Blade
- Carrying Pouch Included

R-750C
Ratchet Cable Cutter

Specifications	
Weight	2 lbs.
Length	9″
Handle Span	6.5″
Cutting Capacities	
1.75″ O.D. Al	
750 MCM Cu	
Optional Accessories	
1819.016	Fixed Blade
1819.013	Moveable Blade

The **R-750C** has a ratchet mechanism that has been designed to withstand the stress of 750 MCM copper and aluminum cables with a maximum O.D. of 1-3/4.″ The blades have a 100% cutting surface which provides the best possible cutting leverage.

A thumb release lever allows the operator to back out of a cut when necessary. A locking mechanism closes the handles for easy storage.

NOTE: DO NOT CUT STEEL.

Features

- Thumb Lever to Release Blade

S-SERIES
Handheld Hydraulic Cutters

Huskie's **S-Series** tools cut anything from guy wire* to anchor rod and most overhead and underground cables. The S-series cutters are portable, lightweight, and made to last years under the toughest field conditions. The S-40B and S-85 feature a two stage pumping piston for rapid advance.

The new S-240CC, S-32CC and SP-24CC hydraulic cutters were specially engineered to cut the toughest EHS guy wire, ground and anchor rods. The SP-24CC is the remote head version, which requires an external 10,000 psi pump in order to operate. The anvil style, center cut blades eliminate jamming problems common to shear style cutters, and the blades are easily replaced in the field. The tools are made of high grade steel and have rubber handle grips. All tools are black zinc oxide coated to help reduce corrosion. A flip-top latch opens the tool jaw to easily accept cables and wires. The head can be rotated up to 180° to facilitate easy wire positioning and operator leverage.

Consult the chart below to pick the proper cutter for your needs. If there are any questions about capacities, or special applications please contact Huskie Tools.

***NOTE:** DO NOT CUT EHS GUY WIRE. FOR EHS GUY WIRE SPECIFY S-240CC, S-32CC OR THE REMOTE HEADS SP-24CC OR SP-32CC1.

Specifications									
Model	**S-16**	**S-20**	**S-240**	**S-32**	**S-40B**	**S-55**	**S-85**	**S-240CC**	**S-32CC**
Output	4.4 Ton	4.4 Ton	7.8 Ton	19.8 Ton	6.3 Ton	13 Ton	2.7 Ton	7.8 Ton	19.8 Ton
Weight	6 lbs.	6 lbs.	9 lbs.	21 lbs.	12 lbs.	17 lbs.	15 lbs.	11 lbs.	23 lbs.
Length	15"L	15"L	17"L	27"L	23"L	24"L	26"L	18.5"L	27"L
Jaw Opening	.6"	.75"	.9"	1.25"	1.6"	2"	3.3"	.9"	1.25"
Capacities									
Wire Ropes	16mm 5/8"	20mm 3/4"	22mm 7/8"	32mm 1-1/4"	20mm 3/4"	26mm 1"	Do Not Cut	Do Not Cut	Do Not Cut
Soft Steel Bolts	16mm 5/8"	17mm 11/16"	22mm 7/8"	32mm 1-1/4"	20mm 3/4"	32mm 1-1/4"	Do Not Cut	16mm 5/8"	26mm 1"
Rebar, Ground & Anchor Rod	13mm 1/2"	13mm 1/2"	16mm 5/8"	22mm 7/8"	16mm 5/8"	20mm 3/4"	Do Not Cut	16mm 5/8"	26mm 1"
Cu & Al Wire	16mm 5/8"	20mm 3/4"	22mm 7/8"	32mm 1-1/4"	40mm 1-1/2"	50mm 2"	76mm 3"	Do Not Cut	Do Not Cut
ACSR	16mm 5/8"	20mm 3/4"	22mm 7/8"	32mm 1-1/4"	40mm 1-1/2"	50mm 2"	Do Not Cut	Do Not Cut	Do Not Cut
Standard Guy Wire	13mm 1/2"	14mm 1/2"	16mm 5/8"	22mm 7/8"	16mm 5/8"	20mm 3/4"	Do Not Cut	14mm 9/16" EHS	22mm 7/8" EHS
Telephone & Lead Sheathed Cable	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	85mm 3.35"	Do Not Cut	Do Not Cut
Chain	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	1/4"	1/2"

Phone: 800-860-6170
Fax: 800-345-3767

S-SERIES
Handheld Hydraulic Cutters

S-16

S-20

S-240

S-240CC

S-32

S-32CC

S-40B

S-55

S-85

SP-SERIES

Hydraulic Operated Remote Cutting Heads

The **SP-SERIES** remote head units connect to any 10,000 psi, high pressure, hydraulic pumping system. Choose from seven different models of production cutters, to cut costs and efforts. A 3/8" screw-type male coupler is supplied with each tool. Huskie Tools remote cutters have a hinged head which can be opened for easy cable or bar insertion. The movable blade advances in a shear fashion, to cut the material cleanly. When the cutting pressure is relieved an internal ram spring retracts the blade. The guillotine cutting style was chosen over scissor type cutting because of its powerful output force, larger cable capacities, compact size and reliability.

All tools can be used under water, consult factory for specific applications.

NOTE: FOR EHS GUY WIRE SPECIFY S-24CC, S-32CC OR THE REMOTE HEAD SP-24CC.

Features

- Lightweight and Portable
- Operate from Any 10,000 psi Hydraulic Source
- Works in Any Position

Specifications										
Model	**SP-20**	**SP-24**	**SP-24CC**	**SP-32**	**SP-32CC1**	**SP-35**	**SP-40**	**SP-55**	**SP-85**	**SP-100**
Output	4.4 Ton	7.8 Ton	7.8 Ton	20 Ton	24 Ton	6.2 Ton	6.28 Ton	13 Ton	2.7 Ton	8.3 Ton
Weight	3 lbs.	6 lbs.	21 lbs.	21 lbs.	26 lbs.	8 lbs.	8.5 lbs.	20 lbs.	16 lbs.	29 lbs.
Length	8"L	11"L	14"L	14"L	13.5"L	14"L	12"L	17"L	19"L	24"L
Jaw Opening	.75"	.9"	.9"	1.25"	1.25"	1.3"	1.6"	2"	3.3"	4"
Capacities										
Wire Ropes	20mm 5/8"	22mm 7/8"	Do Not Cut	32mm 1-1/4"	Do Not Cut	Do Not Cut	20mm 3/4"	26mm 1"	Do Not Cut	Do Not Cut
Soft Steel Bolts	14mm 9/16"	20mm 3/4"	16mm 5/8"	32mm 1-1/4"	26mm 1"	14mm 9/16"	16mm 5/8"	32mm 1-1/4"	Do Not Cut	Do Not Cut
Rebar, Ground & Anchor Rod	13mm 1/2"	16mm 5/8"	16mm 5/8"	26mm 1"	26mm 1"	13mm 1/2"	16mm 5/8"	20mm 3/4"	Do Not Cut	Do Not Cut
Cu & Al Wire	20mm 3/4"	22mm 7/8"	Do Not Cut	32mm 1-1/4"	Do Not Cut	800 MCM	40mm 1-1/2"	50mm 2"	76mm 3"	3-1/2"
ACSR	20mm 3/4"	22mm 7/8"	Do Not Cut	32mm 1-1/4"	Do Not Cut	336 MCM	40mm 1-1/2"	50mm 2"	Do Not Cut	Do Not Cut
Standard Guy Wire	14mm 1/2"	16mm 5/8"	14mm 9/16" EHS	22mm 7/8"	22mm 7/8" EHS	14mm 1/2"	16mm 5/8"	20mm 3/4"	Do Not Cut	Do Not Cut
Chain	Do Not Cut	Do Not Cut	1/4"	Do Not Cut	1/2"	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut
Comm. Cables	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	3.35"	4"
Lead Sheath Cables	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	Do Not Cut	3.35"	4"

Phone: 800-860-6170
Fax: 800-345-3767

SP-SERIES

Hydraulic Operated Remote Cutting Heads

SP-20

SP-24

SP-24CC

SP-32

SP-32CC1

SP-35

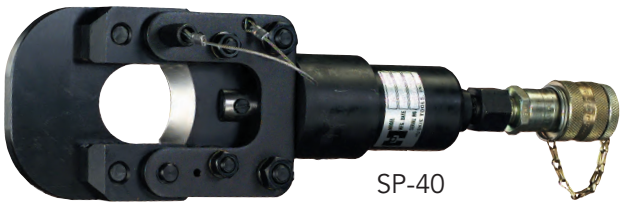

SP-40

SP-55

SP-85

SP-100

YSP-Series
Scissor Cutter Remote Heads

YSP-30

YSP-34

YSP-60

YSP-85YC

Specifications				
Model	**YSP-30**	**YSP-34**	**YSP-60**	**YSP-85YC**
Output	4.4 Ton	4.4 Ton	6.6 Ton	8 Ton
Weight	6 lbs.	6 lbs.	6 lbs.	10.5 lbs.
Length	12″	12″	12″	18″
Capacities				
ACSR	477	Do Not Cut	Do Not Cut	Do Not Cut
Copper	500 MCM*	800 MCM	750 MCM	1000 MCM
Aluminum	1.18″ O.D.	1.24″ O.D.	1.18″ O.D.	3″
Telecommunication	Do Not Cut	Do Not Cut	Do Not Cut	3″
Lead Sheath	Do Not Cut	Do Not Cut	Do Not Cut	2.5″

* Will not cut ALL 500 MCM copper cable-consult factory.

The **YSP-Series** tools are remote cutting heads to be used with a 10,000 psi pumping source.

YSP-30 can cut ACSR up to 477 and copper and aluminum cables up to 1.18″ O.D. WILL NOT CUT 4/0 Penguin or 3/0 Pigeon ACSR cables.

YSP-34 is designed to cut 800 MCM hard drawn copper cable. DO NOT CUT STEEL.

YSP-60 is similar to the YSP-30, except it has a 2″ cable capacity and is ideal for aluminum cables up to 2″ O.D. and 500MCM Copper. DO NOT CUT STEEL.

YSP-85YC is designed to cut various cables, including copper up to 1000 MCM and Aluminum up to 3″. DO NOT CUT STEEL.

HTADPT
Hot Stick Adapter

DA-12

Hydraulic Low Pressure 4" Cable Cutter

Specifications	
Output	6 Ton at 2,500 psi
Weight	31 lbs.
Size	15" x 15" x 17"

Cutting Capacities	
Lead Sheath	4"
Comm. Cables	4200 pair

Features

- Operates on 2500 psi
- 4" Jaw Opening
- Safety Trigger

The **DA-12** hydraulic hand-held, cable cutter can be operated directly from the utility line truck. At 2,500 psi pressure it can cut four-inch lead sheath cables as well as 4200 pair communications cables. A 6 ton cutting force is produced at 2,500 psi pressure, less than 2,500 psi will reduce the cutting capacity. It operates on open center trucks and comes with HTMA couplers.

The four inch jaws slice through lead, copper and aluminum cables cleanly and without jamming because of the double-acting system. The DA-12 is portable, with non-slip, knurled handles and a safety ring. It has a positive open and close position and a special built-in safety trigger. It stops when you stop.

AS-025 & AS-118

Cable Stripper for Semi-con and Secondary

Order Data	
AS-118	Adjustable Stripper
AS-025	Fixed .025 Depth Stripper
ASB	Replacement Blade

Features

- Semi-con Stripper
- .025 Blade Depth Available
- Up to 1" Maximum O.D.

The Huskie **AS-118** cable stripper is used for cables from .180 to 1 inch max. O.D. It has an adjustable blade depth to a maximum of .118" for use on most plastic jacketed cables. Tough insulation can be cut in a spiral direction for easier stripping, while other insulation can simply be cut longitudinally for quicker stripping. The model **AS-025** is the same, except for a fixed blade depth of .025" used for many semi-con jackets.

NP-400

Insulation Stripper

Accessory	
400-10	Replacement Blade

Features

- Capable of Midspan Stripping
- Up to 1-1/4" O.D.
- Copper and Aluminum
- Spring Load

The Huskie **NP-400** can strip insulation from a conductor with an O.D. of .35" to 1-1/4" and a maximum insulation thickness of 3mm (.118). This tool will not work on semi-conductor since the cutting blade uses a scoop design to pull insulation away from the wire strands. It is most commonly used on jacketed aluminum and copper cables for both underground and overhead. Our peeler can handle mid-span stripping as well as cable end preparation. A simple rotation and hand force is all it takes to remove the jacket. Either handle can be removed for close quarter operation.

It is necessary to change the blade depth according to the insulation thickness. Send cable samples to Huskie Tools for testing.

NOTE: NOT FOR REMOVING SEMICONDUCTOR JACKETS.

Phone: 800-860-6170
Fax: 800-345-3767

Hydraulic Pumps & Punches

Hydraulic Pumps & Punches

Huskie Tools Ambassador
Bruce Oakes, Foreman
Company: Pike Electric
South Carolina

Bruce holds the R-14EF and SH-70M.

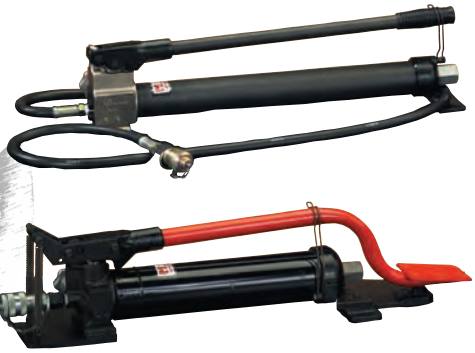

Hydraulic Hand and Foot Pumps
P. 83

Hydraulic Steel Punch & Dies
P. 87

Hydraulic Pumps
Pgs. 84-86

Foot Switch
P. 88

Couplers
P. 89

Remote Control Handle
P. 88

Hydraulic Hose
P. 89

Phone: 800-860-6170
Fax: 800-345-3767

HP-700
10,000 psi Hydraulic Hand Pump

Specifications	
Weight	20 lbs.
Length	23″
Oil Reservoir	44 cu/in fluid
1st Stage	.75 in^3 per stroke
2nd Stage	.14 in^3 per stroke

Features

- Two-Stage Pump Piston for Rapid Advance
- External Pressure Adjustment from 4,000-10,000 psi
- Can Be Operated in Any Position
- Knob Type Release Valve

The **HP-700** a portable, tough, hydraulic steel pump that has two speed pumping pistons for rapid advance and an external adjustable pressure setting from 4,000 to 10,000 psi output. An internal oil bladder allows the tool to be used in any position.

Our exclusive replaceable, by-pass cartridge is standard in the HP-700. Field repairs and pressure adjustments can be made in minutes. Use our PG-1 gauge for pressure adjustments.

NOTE: When using any of these high pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

FP-700
10,000 psi Hydraulic Foot Pump

Specifications	
Weight	25 lbs.
Length	28″
Oil Reservoir	44 in^3 fluid
1st Stage	.75 in^3 per stroke
2nd Stage	.14 in^3 per stroke

Features

- Two-Stage Pump Piston for Rapid Advance
- External Pressure Adjustment from 4,000-10,000 psi
- Can Be Operated in Any Position
- Knob Type Release Valve

The **FP-700** a portable, tough, hydraulic steel pump that has two speed pumping pistons for rapid advance and an external adjustable pressure setting from 4,000 to 10,000 psi output. An internal oil bladder allows these tools to be used in any position.

Our exclusive replaceable, by-pass cartridge is standard in the FP-700. Field repairs and pressure adjustments can be made in minutes. Use our PG-1 gauge for pressure adjustments.

NOTE: When using any of these high pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

R-14EF

1/2 HP, 10,000 psi Hydraulic Pump

Specifications	
Weight	34 lbs.
Size	7"L x 6"W x 14"H
Power Output	1/2 HP-6.5 Amp
Delivery @ 200 psi	157 in^3/min
Delivery @ 10,000 psi	19 in^3/min
Oil Capacity	120 in^3 (2 quarts)

Optional Accessories	
REC-P1CASE	Steel Carrying Case, p. 94
URH-14	Remote Control Handle, p. 88
FS-14	Foot Switch, p. 88

Features

- Remote Operation Allows Full Operator Control
- Advance and Hold Feature Standard
- Manual Control Directly on Pump Motor
- Pressure Adjustment from 4,000-10,000 psi

The **R-14EF** remote operated pump gives the operator complete control. Push buttons permit the user to advance and retract at will. The user is never committed to a full cycle, and can always back off at any time during the advance even under pressure. This feature increases efficiency because cuts and crimps can be adjusted as necessary, simply by stopping the advance or retract mode. A 10-foot remote control cable provides both safety and convenience. The user can set up an operation and then move away from the work site before engaging the tool. An over-ride switch on the pump allows full control at the pump motor. The low amperage of this pump allows it to be used virtually anywhere. The pressure can be easily adjusted between 4,000 and 10,000 psi and determined by using our PG-1 in-line gauge. Consult factory for proper adjusting procedure.

NOTE: When using any of these high pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

R-14EA

3/4 HP, 10,000 psi Single Acting Hydraulic Pump

Specifications	
Weight	75 lbs. with Oil
Size	14"L x 13.25"W x 16"H
Power Output	3/4 HP - 8.2 Amp
Delivery @ 300 psi	157 in^3/min
Delivery @10,000 psi	36 in^3/min
Oil Capacity	182 cu/in (3 quarts)

Optional Accessories	
URH-14	Remote Control Handle, p. 88
FS-14	Foot Switch, p. 88

Features

- Remote Operation Allows Full Operator Control
- Manual and Automatic Mode for Additional Versatility
- 3/4 HP Rating
- Low Amperage Requirement

The **R-14EA** is a fully remote controlled, single acting, 10,000 psi, electric pump. The two button hand control allows the user to advance, hold, or release at any time. When 10,000 psi is reached, the pump will automatically shut off and hold until the operator pushes the release button to retract the tool. There is an auto cycle switch that allows the operator to push the advance button and the pump will automatically advance, run to 10,000 psi and release. This feature is mostly used for production crimping and cutting where the operator must have the freedom of both hands. A remote foot control pedal is optional.

NOTE: When using any of these high pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

Phone: 800-860-6170
Fax: 800-345-3767

R-14EAD

3/4 HP, 10,000 psi Double Acting Hydraulic Pump

The **R-14EAD** is a fully remote controlled, double acting, 10,000 psi, electric pump. The hand control allows the user to advance or release at any time. There is an auto cycle switch that allows the operator to push the advance button and the pump will automatically advance, run to 10,000 psi and release. This feature is used mostly for production crimping and cutting, where the operator must have the freedom of both hands. A remote foot control pedal is optional.

NOTE: When using any of these high pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

Specifications	
Weight	75 lbs. with Oil
Size	14"L x 13.25"W x 16"H
Power Output	3/4 HP - 8.2 Amp
Delivery @ 300 psi	157 in^3/min
Delivery @10,000 psi	36 in^3/min
Oil Capacity	182 cu/in (3 quarts)
Optional Accessories	
FS-14	Foot Switch, p. 88

Features

- Remote Operation Allows Full Operator Control
- Manual and Automatic Mode for Additional Versatility
- Low Amperage Requirement

HPG-4

4 HP, Gas Engine 10,000 psi Hydraulic Pump

The **HPG-4** is a self-contained high pressure pump, with manual operation. It is equipped with a 4 HP Briggs & Stratton engine. A four-way valve controls the hydraulic fluid direction for the advance and retract modes. One double acting tool can be operated or two single acting tools at one time. Connection to one port for single acting tools will work since the control valve will dump the fluid when shifted to the retract position. The pump is very compact and comes with carrying handles.

NOTE: When using any of these high pressure tools, always use 10,000 psi rated non-conductive hose (NC-16 series).

Specifications	
Weight	74 lbs. with Oil
Oil Capacity	5 Gallons
Gas Tank	3 Pints
Max Pressure	10,000 psi
Power Output	4 HP
Oil Delivery @ 100 psi	480 in^3/min
Oil Delivery @ 10,000 psi	55 in^3/min

Features

- Four Way Valve Allows for Single or Double Acting Capacity
- Standard Screw Type Male and Female Couplers

RC-5
Optional Roll/
Carry Cage

REC-P1 ROBO*PUMP

10,000 psi Battery Powered 28.8 Volt Pump

Specifications	
Output	10,000 psi
Weight	23 lbs. with 2 Batteries
Size	16"L x 6"H x 10"D

Crimping Estimates	
	2 BP-80
Using a 10 ft. Hose and EP-60W on 1272 ACSR	12
No Load Cycle Time	Advance 25 Sec., Retract 30 Sec.

Optional Accessories	
FS-14	Foot Switch, p. 88
URH-14	Remote Handle, p. 88
REC-P1CASE	Steel Carrying Case, p. 94

Features

- Powerful 28.8 Volt
- Operate Up to Single Acting 60 Ton Press
- Adjustable 10,000 psi
- Eliminates the Need for AC Power
- Compact and Portable

The Huskie **REC-P1** is a 28.8 volt, battery operated hydraulic pump that runs on two 14.4 Volt Huskie BP-80 series batteries. The REC-P1 is supplied with a push button remote control that allows the operator to advance, hold, and retract when needed. The user is never committed to a full cycle and can always back off at any time during the advance– even when the pump is under pressure. High pressure, non-conductive hose can be attached to a 360° moveable swivel port on the pump. This swivel port allows the user to position the hose to fit in confined aerial buckets and manholes.

Both batteries must be inserted in the pump to operate. It is recommended to operate the pump with a 10 foot hose, up to a maximum of 20 feet. A longer hose will cause cycle times to increase.

We recommend you specify the Huskie SC-Series flush face dripless couplers, as not to deplete the oil in the reservoir when changing heads.

For additional ordering information, please refer to page 10.

SH-270M

35 Ton Hydraulic Steel Punch

The portable **SH-270M** punch was designed to punch holes through 1/2" mild steel, aluminum and copper. The punched hole size is 1/16" larger than your bolt size. A stripper guide extends on either side of the ram to strip the material after punching. This hand-held unit will operate from any 10,000 psi hydraulic pumping source.

Some uses include the punching of bus bars, tower iron, railing, I-beams and truck frames. Custom size punch and dies are available upon request. Oval and square sizes are also available. Consult factory for order information. The SH-270M and SH-270F comes complete with four sets of punch and die sizes for 3/8", 1/2", 5/8" and 3/4" bolts and carrying case.

NOTE: USE ONLY 10,000 psi RATED HOSE.

Specifications	
Output	35 Ton
Weight	28 lbs.
Capacity	1/2" Thick Mild Steel
Max. Hole	13/16" Diameter
Dimensions	14" x 8" x 3.5"
Throat Depth	2.75"

Order Data	
SH-70M	Steel Punch with Male Coupler
SH-70F	Steel Punch with Female Coupler

Features

- Punches UP to 1/2" Mild Steel
- 13/16" Max Hold Diameter
- Will Punch: Oval, Round, Square, and Slotted Holes
- Custom Sizes Available
- Operates from a 10,00 psi Pump Source

Round Dies

ITEM	DESCRIPTION	BOLT SIZE
SHD-18	1/8" Punch & Die Set	
SHD-316	3/16" Punch & Die Set	
SHD-14	1/4" Punch & Die Set	
SHD-932	9/32" Punch & Die Set	
SHD-516	5/16" Punch & Die Set	
SHD-38	3/8" Punch & Die Set	
SHD-716	7/16" Punch & Die Set 10.5	3/8"
SHD-12	1/2" Punch & Die Set	
SHD-916	9/16" Punch & Die Set 13.5	1/2"
SHD-58	5/8" Punch & Die Set	
SHD-1116	11/16" Punch & Die Set 17.5"	5/8"
SHD-34	3/4" Punch & Die Set	
SHD-1316	13/16" Punch & Die Set 20.5	3/4"

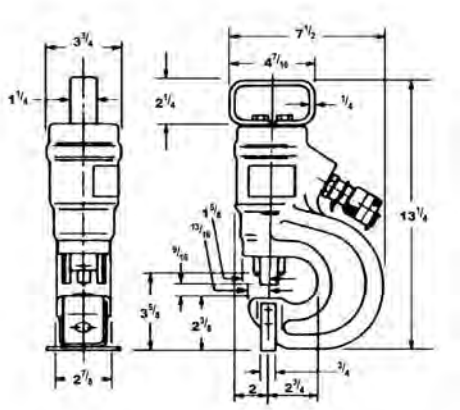

Oblong Dies

ITEM	DESCRIPTION	BOLT SIZE
SHD-516X1316	5/16" X 13/16" Oblong Punch & Die Set	
SHD-38X1316	3/8" X 13/16" Oblong Punch & Die Set	
SHD-716X1316	7/16" X 13/16" Oblong Punch & Die Set	3/8"
SHD-12X38	1/2" X 3/8" Oblong Punch & Die Set	
SHD-12X34	1/2" X 3/4" Oblong Punch & Die Set	
SHD-12X1316	1/2" X 13/16" Oblong Punch & Die Set	
SHD-916X34	9/16" X 3/4" Oblong Punch & Die Set	1/2"
SHD-916X1316	9/16" X 13/16" Oblong Punch & Die Set	1/2"
SHD-58X1316	5/8" X 13/16" Oblong Punch & Die Set	
SHD-1116X1316	11/16" X 13/16" Oblong Punch & Die Set	5/8"
SHD-34X1316	3/4" X 13/16" Oblong Punch & Die Set	

Square Dies

ITEM	DESCRIPTION
SHD-14SQ	1/4" Square Punch & Die Set
SHD-38SQ	3/8" Square Punch & Die Set
SHD-716SQ	7/16" Square Punch & Die Set
SHD-12SQ	1/2" Square Punch & Die Set
SHD-1732SQ	17/32" Square Punch & Die Set
SHD-916SQ	9/16" Square Punch & Die Set

Hex Dies

ITEM	DESCRIPTION
SHD-716HEX	7/16" Hex Punch & Die Set
SHD-916HEX	9/16" Hex Punch & Die Set
SHD-1116HEX	11/16" Hex Punch & Die Set
SHD-1316HEX	13/16" Hex Punch & Die Set

URH-14
Remote Control Handle

Specifications	
Weight	3 lbs.
Size	8"L x 1.5"W x 6.5"H

Order Data	
URH-14	Remote Control Handle
REC-URH	Remote Control Handle for REC-P1

Features

- For Use with All Electrical and Battery Operated Single Acting Pumps
- Allows Operator One Hand Control at the Tool Head
- 10 Foot Cord

The **URH-14** remote control handle is for use with the R-14EF, R-14EA and REC-P1 pumps. It is equipped with a standard 3/8" high pressure coupler that can be easily matched to your existing tool head. A 10 foot, three wire control cable can be hooked directly to the R-14EF or hard wired to any pump that has similar remote control features. The URH-14 weighs only three pounds and is made of tough, durable, molded plastic with a double insulated on/off switch.

FS-14
Foot Switch

Specifications	
Weight	4.2 lbs.
Size	9.5"L x 7"W x 3"H

Optional Accessories	
URH-14	Remote Control Handle
FS-14	Foot Switch

Features

- For Use with All Electrical and Battery Operated Single Acting Pumps
- Allows Operator "Hands Free" Control of Advance and Retract Pump Mode
- 10 Foot Cord

The **FS-14** was designed to replace our pendant hand control on pump models R-14EF, R-14EA, R-14EAD and REC-P1. This foot control allows the operator to free his hands for better control of his work load. It has a green pedal for the advance mode and a red pedal for the retract mode. The FS-14 is mostly used in work bench applications.

Phone: 800-860-6170
Fax: 800-345-3767

NC-SERIES

10,000 psi High Pressure Hydraulic Hose

Our high pressure, non-conductive **NC-SERIES** hoses and couplers are rated at 10,000 psi working pressure. The hose ends are covered with a thick clear jacket of heavy duty shrink wrap to reduce the risk of hose bursts at these points. They are also date coded during assembly. As a result of injuries sustained by operators of hydraulic products via broken or damaged high pressure hoses Huskie has developed a replacement hose improvement program for our customers. Consult your representative for information. Our hoses come standard with 3/8" male/female couplers.

NOTE: FOR OPERATOR SAFETY WE RECOMMEND HOSE REPLACEMENT AFTER 3 YEARS.

Order Data	
NC-1606	3/16" x 6'
NC-1610	3/16" x 10'
RB-1610	3/16" x 10' (Rubber Bound)
NC-1615	3/16" x 15'
NC-1620	3/16" x 20'
NC-1625	3/16" x 25'
NC-450	1/3" x 50' (1/4" NPT Standard Ends)

3/8" NPT hose ends standard. 1/4" NPT also available. Any combination of high pressure couplers are available. Simply specify the kind you require when ordering.

Features

- Highly Visible Safety Orange (RB-1610 is Brown)
- Heavy Duty Shrink Wrap at Hose Ends for Reduced Risk of Leaking
- Date Coded at Point of Assembly

SC-SERIES

10,000 psi High Pressure Flush Face Couplers



The **SC-SERIES** are flush face, snap-type couplers for use in high pressure applications. They are not interchangeable with low pressure flush face couplers. Positive connect or disconnect prevents tool failure due to partial coupled halves of conventional screw-type couplers.

Specifications	
Hose End	3/8" NPT
Threaded End	3/8" NPT
Working Pressure	10,000 psi
Minimum Burst Pressure	
Coupled	34,800 psi
Uncoupled	29,000 psi
Hand Connection	250 psi at 150 lbs.
Fluid Loss Per Disconnection	.035 ml

Order Data	
SCF-8F	Female Half with Female Port
SCF-8	Female Half with Male End
SCM-8	Male Half with Female Port
FC-8F	Female Half with Female Port
FC-8	Female Half with Male Port
DC-SCF	Female Cap

Features

- 10,000 psi Operating Pressure Marked on Both Halves
- Simple Quick Connect and Disconnect
- Twist Sleeve Lock to Prevent Accidental Disconnect
- Flush Face, NON-DRIP Valving, Both Halves

Hydraulic Oil

Order Data	
HF-5G	5 Gallon Container
HF-1G	Gallon Container
HF-1Q	Quart Container
HF-5GRED	Red Hydraulic Fluid for Low Temperatures
HF-1GRED	Red Hydraulic Fluid 1 Gallon
HG-1QRED	Red Hydraulic Fluid Quart

Huskie Tools offers replacement **Hydraulic Oil** in three sizes for any service needs. It is our own MV-32 clear hydraulic fluid and can be used in all of our hydraulic products. This fluid can also be added to other clear hydraulic fluids for filling or topping off a hydraulic circuit. Do not mix with other red or blue colored hydraulic fluids as this will "gel" and cause the tool or pump to malfunction. A complete MSDS is available from Huskie Tools upon request.

Phone: 800-860-6170
Fax: 800-345-3767

Additional Tooling & Accessories

ECO-L90
LED Light

Specifications	
Length	17.5″
Weight	2.15 lbs. with Battery

The **ECO-L90** has 90 LED lights to brighten up any work area. The lightweight design and top hook allows the light to be hung overhead.

EZ-HLSTR/SL-HLSTR
Huskie Tools Holster

Specifications	
Size	23.5″H x 7″W

Features

- Two Grommets Allow the Holster to Hang in a Bucket
- Very Durable
- Velcro® Sides for Quick Tool Access
- Side Pocket and Carabiner for Extras

Order your own Huskie Holster, the **EZ-HLSTR/SL-HLSTR**, to carry your ECO-EZ, SL tool or any manual hydraulic tool! The Huskie Tools Holster keeps your inline tool close to your side, and Velcro® allows you to quickly grab the tool from the pouch. Two large grommets make it easy to hang the holster inside a bucket. There's a pocket and a key ring on the front for the extras you need while on the job. Each holster also comes with a carabiner. The holster is manufactured by Buckingham.

Phone: 800-860-6170
Fax: 800-345-3767

25CAT

Optional Cutter Head Attachment for REC-558U

Specifications	
Capacity	500 MCM Cu*
Jaw Opening	1"

* Will not cut ALL 500 MCM copper cable-consult factory.

REC-558U
See page 21

UDK-1 and PU-15

"U" Die Adapters

UDK-1

PU-15

The **UDK-1** is a "U" die adapter for Kearney-style, 12 ton tools (REC-5510K and REC-3510K) and the **PU-15** is a "U" die adapter for our 15 ton compression tools.

ECO-EZHBAG

Specifications	
Size	24"L X 11.5"W

Carry tools and accessories with the **ECO-EZHBAG**. The bag is made of weather resistant vinyl and has two Velcro® closures. Large pockets on the outside hold extra accessories. The bag measures 24" in height and 11.5" wide.

REC-P1CASE

Steel Carrying Case

The **REC-P1CASE** stores and carries Huskie Tools Pumps and accessories like extra batteries and crimping heads. Also fits the R-14EF.

Phone: 800-860-6170
Fax: 800-345-3767

Cutting Tool Selection Guide

The marketplace has a variety of cable and rod cutters yet there is not a single cutter capable of cutting "everything". There are many variables to consider when choosing a cutter, such as, the cable material (copper, aluminum or steel) and the cable type (solid strand, multiple strand, steel core, hardened or soft). Other factors include the type of cut needed (clean or non-distorted as opposed to a jagged cut) and the rod and cable size which should not exceed the cutting capacity.

Cutters should be selected with all of the above factors in mind. As a rule, a few different types of cutters are needed to perform a variety of cutting jobs. Suggested considerations when choosing a cutter include:

1. What is the most frequently cut cable or rod size, type, and what kind of cut is needed?
2. How much time can be saved by using this tool compared to your usual way of cutting?
3. What kind of power source do you need: portable, electric, or gasoline?
4. How often will you be using this tool per day?
5. What are the ergonomic and safety benefits for the user?
6. Consider the quality of the products; are parts and repair services available?
7. What is the reputation of the company you are purchasing from?
8. Cost is the last consideration since your chosen cutter will pay for itself over the next few jobs.

Compression Tool Selection Guide

When choosing a compression tool, the output tonnage, the jaw opening, and type of tool (electric, battery driven, or mechanical) are the major considerations. Your tool choice should be based on the following guidelines:

1. What is the size of the most commonly compressed cable or sleeve. The cable should be able to fit between the jaws for easy removal after crimping.
2. Consider the physical tool size, ease of handling and operation.
3. What is the frequency of operation? Is this just part of the job or is this a production job requiring constant running of the tool?
4. Is the tool ergonomically designed to protect the operator from all hazards?
5. Choose to buy from a company which stands behind its products. This will usually ensure that parts, service, and dealers are readily available to service your needs.
6. Pricing is your last consideration since the proper tool will pay for itself over the next few jobs and be working for you over the next several years.

ACSR Cutting Guide

Use Huskie REC-54M For These Cable Sizes

ACSR Code	Cir. Mills or A.W.G.	ACSR Code	Cir. Mills or A.W.G.	ACSR Code	Cir. Mills or A.W.G.	ACSR Code	Cir. Mills or A.W.G.
Turkey	6	Owl	266	Lark	397	Peacock	605
through		Partridge	266	Pelican	477	Squab	605
Robin	1	Ostrich	300	Flicker	477	Teal	605
Raven	1/0	Merlin	336	Hawk	477	Rook	636
Quail	2/0	Linnet	336	Hen	477	Grosbeak	636
Pigeon	3/0	Oriole	336	Parakeet	556	Egret	636
Penguin	4/0	Chickadee	397	Dove	556	DO NOT CUT Guy Wire, Ground Rod or Bolts	
Waxwing	266	Ibis	397	Eagle	556		

See page 40 for additional specifications.

Use Huskie REC-S540 For These Cable Sizes

ACSR Code	Cir. Mills or A.W.G.	ACSR Code	Cir. Mills or A.W.G.	Material	Size
Flamingo	666	*Drake	795	Standard Guy Wires	5/8"
Crow	715	Condor	795	Bolt	5/8"
Starling	715	Mallard	795	Ground Rod	3/4"
Redwing	715				

*Use Huskie S-55 or SP-55 to cut Drake Cable!

Use Huskie S-55, SP-55 or REC-S3550 For These Cable Sizes

ACSR Code	Cir. Mills or A.W.G.	ACSR Code	Cir. Mills or A.W.G.	Material	Size
Crane	874	Finch	1113	Standard Guy Wires	3/4"
Canary	900	Pheasant	1272	Bolt	7/8"
Cardinal	954	Plover	1431	Ground Rod	3/4"
Curlew	1033	Falcon	1590		

If you have any questions about capacities or special applications, please contact Huskie Tools at 1-800-860-6170.

Phone: 800-860-6170
Fax: 800-345-3767

Huskie Tools Representative Directory

UNITED STATES

ALABAMA
Tice & Associates, Inc.
P.O. Box 1168
Trussville, Al 35173
Phone: 205-413-8920
Fax: 205-413-8921
terri@tice-associates.com
www.tice-associates.com

ALASKA
Carlson Sales, Inc.
9808 NE 126th Ave., Bld. C
Vancouver, WA 98682
Phone: 360-573-8203
Fax: 360-573-8289
www.carlson-sales.com

ARIZONA
Clark Power Products, Inc.
16411 N. 90th St., Suite 108
Scottsdale, AZ 85260
Phone: 480-661-8599
Fax: 480-614-0125
sales@clarkpowerproducts.com

ARKANSAS
Aertker Company
2412 Marietta Street
Kenner, LA 70063
Phone: 504-469-0136
Fax: 504-910-0070
sales@aertkerco.com
www.aertkerco.com

CALIFORNIA - NORTHERN
Isberg Nott Company
4725 First St. Suite 265
Pleasanton, CA 94566
Phone: (925) 426-4718
Fax: (925) 426-0323
isberg-nott@isberg-nott.com

CALIFORNIA - SOUTHERN
McAvoy & Markham, Inc.
16 Technology Dr., Suite 113
Irvine, CA 92618
Phone: (949) 727-3966
Fax: (949) 727-3910
sales@mcavoy-markham.com
www.mcavoy-markham.com

COLORADO
Mountain States Utility Sales
721 Gateway Avenue
Fort Morgan, CO 80701
Phone/Fax: (970) 867-3731
sam@msutilitysales.com

CONNECTICUT
UCI Sales Group, LLC.
22 Whiteside St.
Newington, CT 06111
Phone: (860) 667-4766
Fax: (860) 667-4766
sales@ucisales.com

DELAWARE
Strategic Partners of PA, Inc.
100 Fairview Dr.
West Chester, PA 19382
Phone: 610-459-2117
Fax: 610-459-459-9140
pwasr@comcast.net

FLORIDA - EXCEPT PAN HANDLE
LJ Smith Company, LLC
13740 Sheffield Street
Wellington, FL 33414
Phone: 561-386-3414
Fax: 561-798-7460
ljsmith2008@bellsouth.net

FLORIDA - PAN HANDLE
Tice & Associates, Inc.
P.O. Box 1168
Trussville, Al 35173
Phone: 205-413-8920
Fax: 205-413-8921
terri@tice-associates.com
www.tice-associates.com

GEORGIA
Tice & Associates, Inc.
P.O. Box 1168
Trussville, Al 35173
Phone: 205-413-8920
Fax: 205-413-8921
terri@tice-associates.com
www.tice-associates.com

HAWAII
Carlson Sales, Inc.
9808 NE 126th Ave., Bldg. C
Vancouver, WA 98682
Phone: 360-573-8203
Fax: 360-573-8289
www.carlson-sales.com

IDAHO
Carlson Sales, Inc.
9808 NE 126th Ave., Bldg. C
Vancouver, WA 98682
Phone: (360) 573-8203
Fax: (360) 573-8289
www.carlson-sales.com

ILLINOIS
Utility Sales, Inc.
930 E. Oak St., Suite 1
Lake In The Hills, IL 60156
Phone: (800) 253-6248
Fax: (800) 498-8078
info@utilitysales.net
www.utilitysales.net

INDIANA
REPCO
324 Parkview Dr.
P.O. Box 367
New Castle, IN 47362
Phone: (800)-700-5009
Fax: (765) 521-2916
cheryl@roynon.com
www.roynon.com

INDIANA - NORTHWEST
Utility Sales, Inc.
930 E. Oak St., Suite 1
Lake In The Hills, IL 60156
Phone: (800) 253-6248
Fax: (800) 498-8078
info@utilitysales.net
www.utilitysales.net

IOWA
Moehn Electrical Sales, Inc.
6401 N. 90th Street
Omaha, NE 68134-0817
Phone: (402) 572-7875
Fax: (402) 572-7845
jmoehn@moehnsales.com
www.moehnsales.com

KANSAS
Moehn Electrical Sales, Inc.
6401 N. 90th Street
Omaha, NE 68134-0817
Phone: (402) 572-7875
Fax: (402) 572-7845
jmoehn@moehnsales.com
www.moehnsales.com

KENTUCKY
Saver Sales
121 Malabu Dr. Suite 9
Lexington, KY 40503
Phone: (859) 260-1944
Fax: (859) 260-1844
sales@saversales.com
www.saversales.com

LOUISIANA
John J. Aertker Company
2412 Marietta Street
Kenner, LA 70063
Phone: 504-469-0136
Fax: 504-910-0070
sales@aertkerco.com
www.aertkerco.com

MAINE
UCI Sales Group, LLC.
22 Whiteside St.
Newington, CT 06111
Phone: (860) 667-4766
Fax: (860) 667-4766
sales@ucisales.com

MARYLAND - NORTHERN
Strategic Partners of PA, Inc.
100 Fairview Dr.
West Chester, PA 19382
Phone: 610-459-2117
Fax: 610-459-459-9140
pwasr@comcast.net

MARYLAND - SOUTHERN
Utility Service Agency, Inc.
501 N. Main St.
Wake Forest, NC 27587
Phone: (919) 556-6131
Fax: (919) 556-7984
sales@utilityserviceagency.net
www.utilityserviceagency.net

MASSACHUSETTS
UCI Sales Group, LLC.
22 Whiteside St.
Newington, CT 06111
Phone: (860) 667-4766
Fax: (860) 667-4766
sales@ucisales.com

MICHIGAN
Utility Sales, Inc.
930 E. Oak St., Suite 1
Lake In The Hills, IL 60156
Phone: (800) 253-6248
Fax: (800) 498-8078
info@utilitysales.net
www.utilitysales.net

MINNESOTA
Minnkota Sales
Div. of Lee Noonan Co.
2230 County Road H2
Mounds View, MN 55112
Phone: (763) 560-1228
Fax: (763) 560-3282
Steve@leenoonan.com

MISSISSIPPI - NORTHERN
Aertker Company
2412 Marietta Street
Kenner, LA 70063
Phone: 504-469-0136
Fax: 504-910-0070
sales@aertkerco.com
www.aertkerco.com

MISSISSIPPI - SOUTHERN
Tice & Associates, Inc.
P.O. Box 1168
Trussville, Al 35173
Phone: 205-413-8920
Fax: 205-413-8921
terri@tice-associates.com
www.tice-associates.com

MISSOURI - EASTERN
Utility Sales, Inc.
930 E. Oak St., Suite 1
Lake In The Hills, IL 60156
Phone: (800) 253-6248
Fax: (800) 498-8078
info@utilitysales.net
www.utilitysales.net

MISSOURI - WESTERN
Moehn Electrical Sales, Inc.
6401 N. 90th Street
Omaha, NE 68134-0817
Phone: (402) 572-7875
Fax: (402) 572-7845
jmoehn@moehnsales.com
www.moehnsales.com

Huskie Tools Representative Directory

MONTANA
Carlson Sales, Inc.
9808 NE 126th Ave., Bldg. C
Vancouver, WA 98682
Phone: (360) 573-8203
Fax: (360) 573-8289
www.carlson-sales.com

NEBRASKA
Moehn Electrical Sales, Inc.
6401 N. 90th Street
Omaha, NE 68134-0817
Phone: (402) 572-7875
Fax: (402) 572-7845
jmoehn@moehnsales.com
www.moehnsales.com

NEVADA - NORTHERN
Isberg Nott Company
4725 First St. Suite 256
Pleasanton, CA 94566
Phone: (925) 426-4718
Fax: (925) 426-0323
isberg-nott@isberg-nott.com

NEVADA - SOUTHERN
Clark Power Products, Inc.
16411 N. 90th St., Suite 108
Scottsdale, AZ 85260
Phone: (480) 661-8599
Fax: (480) 614-0125
sales@clarkpowerproducts.com

NEW HAMPSHIRE
UCI Sales Group, LLC.
22 Whiteside St.
Newington, CT 06111
Phone: (860) 667-4766
Fax: (860) 667-4766 *51
sales@ucisales.com

NEW JERSEY
RN Utility Sales, Inc.
25 Progress St.
Edison, NJ 08820
Phone: (908) 561-4028
Fax: (908) 561-4833
sales@rnutilitysales.com
www.rnutilitysales.com

NEW MEXICO
Clark Power Products, Inc.
16411 N. 90th St., Suite 108
Scottsdale, AZ 85260
Phone: (480) 661-8599
Fax: (480) 614-0125
sales@clarkpowerproducts.com

NEW YORK - METROPOLITAN
RN Utility Sales, Inc.
25 Progress St.
Edison, NJ 08820
Phone: (908) 561-4028
Fax: (908) 561-4833
sales@rnutilitysales.com
www.rnutilitysales.com

NEW YORK - UPSTATE
UCI Sales Group, LLC.
179 David Road
Rutland, VT 05701
Phone: (802) 773-7380
Fax: (802) 773-7380
sales@ucisales.com
www.ucisales.com

NORTH CAROLINA
Utility Service Agency, Inc.
501 N. Main St.
Wake Forest, NC 27587-1169
Phone: (919) 556-6131
Fax: (919) 556-7984
sales@utilityserviceagency.net
www.utilityserviceagency.net

NORTH DAKOTA
Minnkota Sales
Div. of Lee Noonan Co.
2230 County Road H2
Mounds View, MN 55112
Phone: (763) 560-1228
Fax: (763) 560-3282
Steve@leenoonan.com

OHIO
Roynon Electrical Products Co.
1021 E. Findlay St.
P.O. Box 267
Carey, OH 43316
Phone: (800) 500-4009
Fax: (419) 396-7619
cassie@roynon.com
www.roynon.com

OKLAHOMA
Jones Power Products
12969 Hunters Ridge
Blanchard, OK 73010
Phone: (405) 485-2019
Fax: (405) 485-3484
www.jonespowerproducts.com

OREGON
Carlson Sales, Inc.
9808 NE 126th Ave., Bldg. C
Vancouver, WA 98682
Phone: (360) 573-8203
Fax: (360) 573-8289
www.carlson-sales.com

PENNSYLVANIA
Strategic Partners
100 Fairview Dr., Unit 104B
West Chester, PA 19382
Phone: (610) 459-2117
Fax: (610) 459-9140
pwasr@comcast.net
www.sppa.biz

RHODE ISLAND
UCI Sales Group, LLC.
22 Whiteside St.
Newington, CT 06111
Phone: (860) 667-4766
Fax: (860) 667-4766
sales@ucisales.com

SOUTH CAROLINA
Utility Service Agency, Inc.
501 N. Main St.
Wake Forest, NC 27587-1169
Phone: (919) 556-6131
Fax: (919) 556-7984
sales@utilityserviceagency.net
www.utilityserviceagency.net

SOUTH DAKOTA
Minnkota Sales
Div. of Lee Noonan Co.
2230 County Road H2
Mounds View, MN 55112
Phone: (763) 560-1228
Fax: (763) 560-3282
Steve@leenoonan.com
Jeff@leenoonan.com

TENNESSEE - EASTERN & MIDDLE
Saver Sales
121 Malabu Dr, Suite 9
Lexington, KY 40503
Phone: (859) 260-1944
Fax: (859) 260-1844
sales@saversales.com
www.saversales.com

TENNESSEE - WESTERN
Aertker Company
2412 Marietta Street
Kenner, LA 70063
Phone: 504-469-0136
Fax: 504-910-0070
sales@aertkerco.com
www.aertkerco.com

TEXAS - NORTH
Utility Sales Agents of N. Texas
12220 Ford Rd., Suite 110
Dallas, TX 75234
Phone: (972) 243-0977
Fax: (972) 243-4579
www.utilitysalesagents.com

TEXAS - SOUTH
Wiltex Electrical Sales, Inc.
9310 Campbell Rd.
Houston, TX 77080
Phone: (713) 464-4817
Fax: (713) 465-4360
www.wiltex.com

TEXAS - EL PASO
Clark Power Products, Inc.
16411 N. 90th St., Suite 108
Scottsdale, AZ 85260
Phone: (480) 661-8599
Fax: (480) 614-0125
sales@clarkpowerproducts.com

UTAH
Carlson Sales, Inc.
9808 NE 126th Ave., Bldg. C
Vancouver, WA 98682
Phone: (360) 573-8203
Fax: (360) 573-8289
www.carlson-sales.com

VERMONT
UCI Sales Group, LLC.
179 David Road
Rutland, VT 05701
Phone: (802) 773-7380
Fax: (802) 773-7380
sales@ucisales.com

VIRGINIA
Utility Service Agency, Inc.
501 N. Main St.
Wake Forest, NC 27587-1169
Phone: (919) 556-6131
Fax: (919) 556-7984
sales@utilityserviceagency.net
www.utilityserviceagency.net

WASHINGTON
Carlson Sales, Inc.
9808 NE 126th Ave. Bldg. C
Vancouver, WA 98682
Phone: 360-573-8203
Fax: 360-573-8289
www.carlson-sales.com

WEST VIRGINIA - NORTHERN
Strategic Partners
100 Fairview Dr., Unit 104B
West Chester, PA 19382
Phone: (610) 459-2117
Fax: (610) 459-9140
pwasr@comcast.net
www.sppa.biz

WEST VIRGINIA - SOUTHERN
Utility Service Agency, Inc.
501 N. Main St.
Wake Forest, NC 27587-1169
Phone: (919) 556-6131
Fax: (919) 556-7984
sales@utilityserviceagency.net
www.utilityserviceagency.net

WISCONSIN
Utility Sales, Inc.
930 E. Oak St., Suite 1
Lake in the Hills, IL 60156
Phone: (800) 253-6248
Fax: (800) 498-8078
info@utilitysales.net
www.utilitysales.net

WYOMING
Mountain States Utility Sales
721 Gateway Avenue
Fort Morgan, CO 80701
Phone/Fax: (970) 867-3731
sam@msutilitysales.com

Huskie Tools Representative Directory

CANADA

ALBERTA - NWT - YUKON
LineStar Utility Supply
#1-1381 Hastings Crescent S.E.
Calgary, AB T2G 4C8
Phone: (403) 243-1900
Fax: (403) 243-2063
salesab@linestar.ca
www.linestar.ca

BRITISH COLUMBIA
LineStar Utility Supply
Unit #4, 8125 130 Street
Surrey, BC V3W 7X4
Phone: (604) 594-2701
Fax: (604) 594-2751
sales@linestar.ca
www.linestar.ca

NOVA SCOTIA
Harris & Roome Supply
Division of Graybar Canada
260 Brownlow Avenue
Dartmouth, NS B2Y 3Z6
Phone: (902) 456-0114
Fax: (902) 468-3995
gbarron@graybarcanada.com

NEWFOUNDLAND
Harris & Roome Supply
Division of Graybar Canada
47 Pippy Place
St. John's, NF A1B 3T1
Phone: (709) 722-6161
Fax: (709) 722-8886
pbragg@graybarcanada.com

NEW BRUNSWICK & PRINCE EDWARD ISLAND
Harris & Roome Supply
Division of Graybar Canada
668 Prospect Street
Fredericton, NB E3B 6G9
Phone: (506) 458-8265
Fax: (506) 452-9753
bgammon@graybarcanada.com

ONTARIO
PEFCO Ontario
1734 Finch Avenue
Pickering, Ontario L1V 1K4
Phone: (905) 427-9294
Fax: (905) 427-0540
jmasonpefco@sympatico.ca

QUEBEC
Innova Inc.
1129-1 Roberval Sud
Granby, QC J2G 8C8
Phone: (800) 461-1937
Fax: (450) 372-9936
charlene.dover@innova2000.ca

SASKATCHEWAN & MANITOBA
Prairie Central Line Supply Ltd.
1258 Border St.
Winnipeg, MB R3H 0M6
Phone: (204) 633-1804
Toll Free: 800-701-4441
Fax: (204) 633-1183
sales@pclsupply.mb.ca

MEXICO

TAMPICO
Equipos Electricos Para Alta Tension
AV. Hidalgo #2006-2
Col. Altavista C.P.
Tampico, TAM, Mexico 89240
Phone: (1) 213-41-94
Fax: (1) 213-37-12
luis_stiles@eepat.com
www.eepat.com

LATIN AMERICA & CARIBBEAN
Consult Factory
Huskie Tools
800-860-6170
rrichter@huskietools.com

Authorized Service Centers

UNITED STATES

COLORADO
Q.U.E.S.T Inc.
812 Baseline Place #4
Brighton, CO 80601
Phone: (720) 685-9091
Fax: (720) 655-8143

ILLINOIS
Huskie Tools, Inc.
198 N. Brandon Dr.
Glendale Heights, IL 60139
Phone: (800) 860-6170
Fax: (800) 345-3767

MASSACHUSETTS
Hydron Inc.
273 Weymouth St.
Rockland, MA 02370
Phone: (781) 871-1920
Fax: (781) 878-1507

MINNESOTA
Total Tool Supply, Inc.
315 N. Pierce St.
St. Paul, MN 55104
Phone: (651) 646-4055
Fax: (651) 646-8610

NEW JERSEY (METRO)
Metro Hydraulic Jack Co.
1271 McCarter Hwy.
Newark, NJ 07104
Phone: (973) 350-0111
Fax: (973) 350-0112

NEW YORK - UPSTATE
Linemen's Supply, Inc.
30 Travis Ave.
Binghampton, NY 13904
Phone: (607) 773-2405
Fax: (607) 773-2414

NEW YORK - METROPOLITAN
New Draulic Tools, Inc.
796 E. 140th Street
Bronx, NY 10454
Phone: (718) 292-0680
Fax: (718) 993-3376
(888) 237-3962
www.newdraulictools.com

VIRGINIA
Special Fleet
2500 S. Main St.
Harrisonburg, VA 22801
Phone: (800) 796-9027
Fax: (540) 438-9502
www.specialfleet.com

WASHINGTON
Rohlinger Enterprises, Inc.
18832 Division
P.O. Box 1340
Suquamish, WA 98392
Phone: (360) 598-4287
Fax: (360) 598-6166

CANADA

ALBERTA - NWT - YUKON
LineStar Utility Supply
#1-1381 Hastings Crescent S.E.
Calgary, AB T2G 4C8
Phone: (403) 243-1900
Fax: (403) 243-2063
salesab@linestar.ca
www.linestar.ca

BRITISH COLUMBIA
LineStar Utility Supply
Unit #4, 8125 130 Street
Surrey, BC V3W 7X4
Phone: (604) 594-2701
Fax: (604) 594-2751
sales@linestar.ca
www.linestar.ca

ONTARIO
PEFCO Ontario
1734 Finch Avenue
Pickering, Ontario L1V 1K4
Phone: (905) 427-9294
Fax: (905) 427-0540
jmasonpefco@sympatico.ca

QUEBEC
Innova
1129-1 Roberval Sud
Granby, QC J2G 8C8
Phone: (800) 461-1937
Fax: (450) 372-9936
charlene.dover@innova2000.ca

SASKATCHEWAN & MANITOBA
Prairie Central Line Supply Ltd.
1258 Border St.
Winnipeg, MB R3H 0M6
Phone: (204) 633-1804
Toll Free: 800-701-4441
Fax: (204) 633-1183
sales@pclsupply.mb.ca

MEXICO
Equipos Electricos Para Alta Tension
AV. Hidalgo #2006-2
Col. Altavista C.P.
Tampico, TAM, Mexico 89240
Phone: (1) 213-41-94
Fax: (1) 213-37-12

Index

Symbols

25CAT 21,93

360° 98

A

AC Charger 49
ACSR Cutting Guide 96
AS-025 80
AS-118 80
Authorized Service Centers 109

B

Battery 48
BP-80 48

C

Cable Stripper 80
Charger 49
CH-90 49
CN-58H 56
CN-258 53
Compression Tool Selection Guide 95
Cutting Tool Selection Guide 95

D

DA-12 79
DC Charger 49
Die Cases
- DIE-CASE 69
- HTK-CASE 69
- W-CASE 69

Die Chart 68
Dies 64

E

ECO-EZ 18
ECO-EZHBAG 94
ECO-L90 92
EP-60D 62
EP-60DT 62
EP-60W 61
EP-60WT 61-62
EP-100WC 63
EP-200WA 63
EP-410 54
EP-410H 58
EP-410HT 58
EP-430 55
EP-430H 59
EP-510C 55
EP-510HC 59
EP-510HK 60
EP-510K 56
EP-610H 60
EP-630A 53
EP-630HA 57
EP-750A 54
EP-750HA 57
EZ-97 18
EZ-HLSTR 92

F

Foot Pump 83
Foot Switch 88
FP-700 83

G

Gauges 70
- PG-1 70
- PG-4 70
- PG-15 70
- PG-58 70
- PG-610A 70
- PG-ND 70
- PG-SL 70

H

HA60-SERIES 67
HA100-SERIES 67
Handheld Hydraulic Cutters 75
Holster 92
Hose 89
HP-700 83
HPG-4 85
HT41-SERIES 65
HT58-SERIES 64
HT61-SERIES 66
HTK-CASE 69
HTK-SERIES 66
HT-SERIES 64
Huskie Holster 92
Huskie Representative Directory 107-109
Hydraulic Compression 52
Hydraulic Compression Tools 51
Hydraulic & Manual Cutting Tools 71, 72
Hydraulic Oil 90
Hydraulic Operated Remote Cutting Heads 76
Hydraulic Pumps & Punches 81-82

I

Insulation Stripper 80

L

Light 92
Lithium-Ion Battery 48

N

Phone: 800-860-6170
Fax: 800-345-3767

Index

NC-SERIES 89
NP-400 80

O

Oil, Hydraulic 90
Order Data 10

P

PG-1 70
PG-4 70
PG-15 70
PG-58 70
PG-610 70
PG-610A 70
PG-ND 70
PG-SL 70
PU-15 93
Punch 87

R

R-14EA 84
R-14EAD 85
R-14EF 84
R-750C 73
Ratchet Cable Cutter 73
RC-5 85
REC-5NDSL 22
REC-50U 38
REC-54ACM 39
REC-54M 40
REC-530Y 34
REC-534YC 35
REC-558U 21
REC-560YC 36
REC-585YC 37
REC-3410 26
REC-3510 28
REC-3510K 30
REC-3610 32
REC-5430 27
REC-5510 29
REC-5510K 31
REC-5630 24
REC-5750 25
REC-CN558 23
REC-P1 ..... 47, 86
REC-P1CASE 94
REC-S520 42
REC-S524CC 44
REC-S524H 43
REC-S540 45
REC-S3550 46
REC-SB 33
REC-Y33 41
Remote Control Handle 88
Remote Cutting Heads 76
Replacement Blades
- 20-07 42
- 24-08 43
- 24C-08 44
- 40-14 45
- 55A-10 46

RI-500 73

S

S-16 75
S-20 75
S-32 75
S-32CC 75
S-40B 75
S-55 75
S-85 75
S-240 75
S-240CC 75
SC-SERIES 89
SH-270M 87
SL-630 14
SL-750 15
SL-CB 16
SL-HLSTR 92
SL-ND 13
SL-S20 17
SP-20 77
SP-24 77
SP-24CC 77
SP-32 77
SP-32CC1 77
SP-35 77
SP-40 77
SP-55 77
SP-85 77
SP-100 77
SP-SERIES 76-77
S-SERIES 74-75

T

Titanium 62
Tri-Chemistry Charger 49

U

UDK-1 93
URH-14 88

W

Warranty 6
W-CASE 69
Wire Rope Dies 69

Y

YSP-Series 78

Huskie Tools Ambassadors

Bill Adrian

James Chapman

Dennis Liebelt

John Pozniak

Harry Cottrill

Joe Campbell

Steve Long

Richard Jurey

Clyde Legg

Dennis McClellan

Burt Duncan

Jesse Simmons

Jim Evard

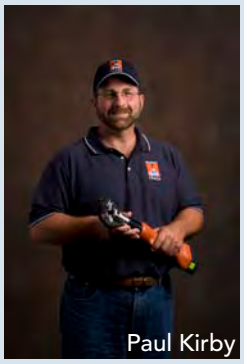
Paul Kirby

James Huber

Joey Ducote

Cory Hightower

Jason Langworthy

Al Withers

Don Smith

Richard Sanders

Neal Walker

Bruce Oakes

Thank You!

There's no such thing as compromise for experienced linemen.

They don't know the meaning of the word "quit" and there's no "halfway done". They take pride in their work.

They are the best of the best, and that's why Huskie Tools has chosen these individuals as Ambassadors.

Over the past 35 years, Huskie Tools has built one of the industry's most respected and successful businesses. We owe our success in large part to our single-minded focus on designing the highest quality hydraulic compression and cutting tools on the market today.

While Huskie Tools services clients worldwide across a myriad of industries, we have a common bond with each. It's our absolute commitment to building integrated and lasting customer relationships. Our continuing mission is to understand how our product improvements can increase productivity through better ergonomics, while reducing worksite injuries and accidents. For us, there can be no higher goal.

The catalog you hold represents our state-of-the-art in handheld, lightweight and fully portable tools. These are customer-centered products designed in part with the aid of our customers' input. And each tool is designed to deliver precision performance and meet the specific needs of the ever-changing industries it serves.

These aren't just any tools — they're tools that define careers. Today, tomorrow and into the future, you'll count on us to be there for you — in any emergency, ready to assist with superior products, unparalleled expertise and dedicated service. We wouldn't have it any other way.

Huskie TOOLS

198 N. Brandon Drive
Glendale Heights, IL 60139
(800) 860-6170 • Fax: (800) 345-3767
www.huskietools.com